



2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

## Table of Contents

Introduction . . . . .	1
How to Order Modular Power Unit . . . . .	2
Universal Manifolds . . . . .	4
Power Unit Models . . . . .	7
Pump and Motor Assembly . . . . .	27
Valve Pack . . . . .	29
Motor: AC & DC . . . . .	30
Pressure Loaded Gear Pump . . . . .	34
Flow Divider . . . . .	36
Reservoir: Steel & Plastic . . . . .	37
12V & 24V DC Motor & Pump Performance Curve . . . . .	42
Installation Recommendation . . . . .	50
Fluid Recommendation . . . . .	51
Warranty . . . . .	52





2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

---

KTI Hydraulics Inc., was established in 1997. The vision of our two founders, George King and Robert W. Habermann, was the KTI design philosophy for the original Universal Manifold® concept.

This concept has inherent integral features that are incorporated in the machined Universal Manifold®. It weighs less than 2 pounds, has eighteen basic hydraulic circuits, allows the use of an assortment of optional pumps with different displacements, a selection of reservoirs with different capacities and will mount to both AC and DC electric motors.

The basic four cavities (“H” concept) uses SAE O-ring cap plugs, cavity plugs or self contained functional cartridge valves. This hardware assortment allows the design to achieve any one of the six basic single acting hydraulic circuits.

An external mounting surface is also incorporated in the machined Universal Manifold® design. It allows for custom multiple valve circuits to be mounted on the basic power unit. Preformed cavities allow the use of hexagon or square steel nuts to lock the body in place for aluminum to aluminum retention.

In 2002, the Universal Manifold® II was conceived and developed for double acting applications. This design complemented the Universal Manifold® I design. The two designs greatly expanded our circuit selection. In 2004, the Universal Manifold® III was developed for dual double acting applications. Then it was adopted for standard snow plow circuit w/power angling, crossover relief & lift check, lower w/ float function. From the snow plow circuit, we were able to design a Double Acting & Single Acting Function in one manifold without requiring additional hydraulic manifold.

All KTI hydraulics power units are 100% fully inspected to stringent test specifications. The tests insure to our customers that they will receive reliable, high quality hydraulic power systems that will perform to our design specifications.



2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

## How to order AC and DC Power Units

### Circuit

1

- A) 101
- B) 102
- G) 102A RV ONLY
- H) 102B CV ONLY
- C) 103
- R) 103A
- D) 104A
- E) 104B
- F) 105
- I) 106
- K) 108
- L) 109
- M) 110
- N) 111
- Q) 114
- S) 114A
- T) 208
- U) 211
- V) 215
- X) 216

### Pump

2

PL  $\text{in}^3/\text{r}$

- M) PL-0.63 (0.0383)
- L) PL-0.80 (0.0543)
- B) PL-1.20 (0.0775)
- C) PL-1.60 (0.1013)
- D) PL-2.10 (0.1324)
- E) PL-2.70 (0.1709)
- G) PL-3.20 (0.2026)
- H) PL-4.20 (0.2625)
- I) PL-5.10 (0.3113)
- J) PL-6.00 (0.3681)

### Motor

3

- A) 12V DC, 4.5" OD 2 term
- B) 12V DC, 3.0" OD 1 term
- C) 24V DC, 4.5" OD 2 term
- D) 0.5HP/1PH/115-230/TEFC/1750 RPM
- E) 0.5HP/3PH/230-460/TEFC/1750 RPM
- H) 1.0HP/1PH/115-230/TEFC/1750-3450 RPM
- I) 1.0HP/3PH/230-460/TEFC/1750-3450 RPM
- O) 1.5HP/1PH/115-230/TEFC/1750-3450 RPM
- T) 1.5HP/3PH/230-460/TEFC/1750 RPM
- L) 2.0HP/1PH/115-230/TEFC/1750-3450 RPM
- M) 2.0HP/3PH/230-460/TEFC/1750-3450 RPM
- J) 3.0HP/1PH/230/TEFC/3450 RPM
- K) 3.0HP/3PH/230-460/TEFC/3450 RPM
- P) 12V DC, 4.5" OD 2 term, Saddle Mount
- Q) 24V DC, 4.5" OD 2 term, Saddle Mount
- R) 12/24V DC, 5.0" OD 2 term OEFC







2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)


## How to order AC and DC Power Units

Reservoir	Mounting	Misc	Special	RV Set
4	5	6	7	8
K) 1.5 QT steel deep drawn	A) Horizontal	F) None		G) 1000 PSI
A) 2 QT steel deep drawn	B) Vertical	A) Heavy Duty Start Solenoid		B) 1500 PSI
B) 3 QT steel deep drawn	C) Pump Motor	B) Cont Duty Start Solenoid		C) 2000 PSI
C) 4 QT steel deep drawn				A) 2500 PSI
D) 4 Qt steel offset			A) None	D) 3000 PSI
E) 6 Qt steel offset			I) DO3 Transition	E) 3500 PSI
F) 8 Qt steel offset			II) Dual DO3 Transition	F) Other
G) 10 Qt steel offset				
H) 12 Qt steel offset				
I) 3 Qt plastic offset				
O) 4 Qt plastic offset				
P) 6 Qt plastic offset				
Q) 8 Qt plastic offset				
J) 14 Qt plastic offset				
T) 16 Qt plastic offset				
U) 2 Gallon Steel Square				
L) 3 Gallon Steel Square				
M) 4 Gallon Steel Square				
N) 5 Gallon Steel Square				


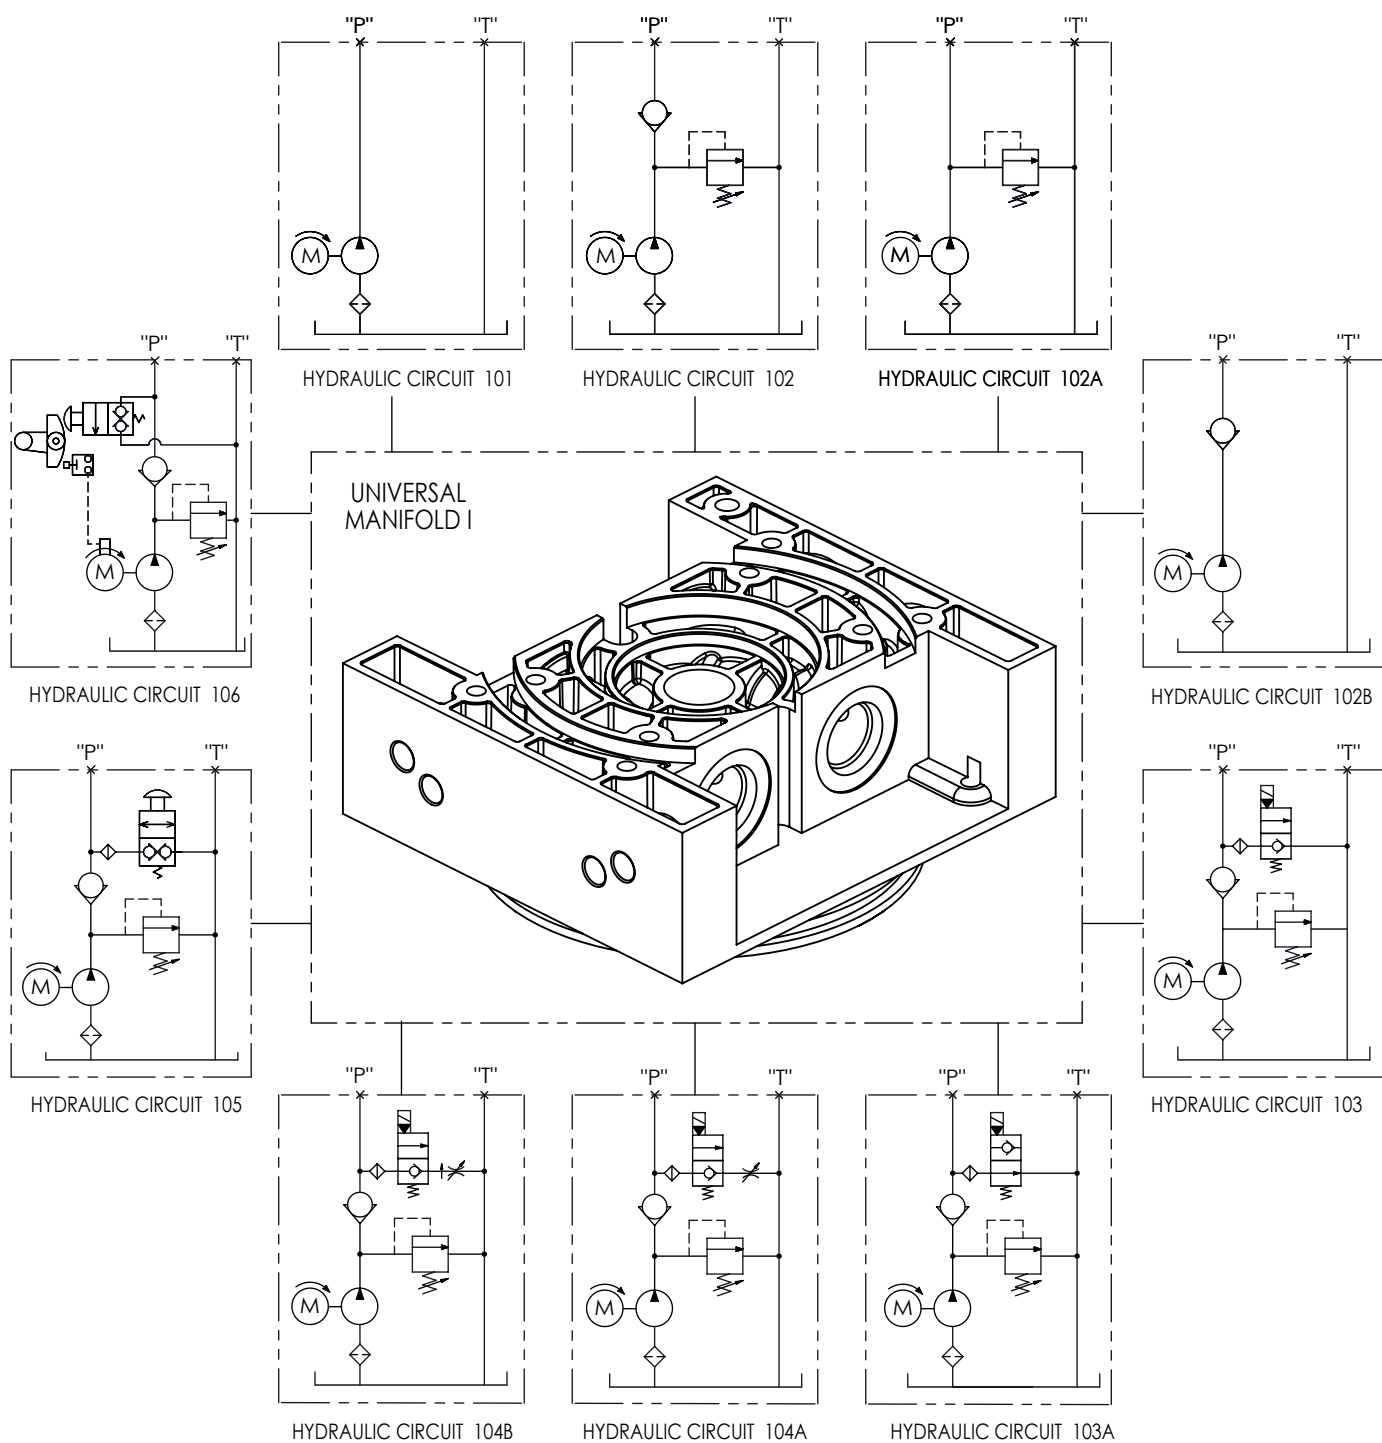





HYDRAULIC CIRCUIT 108  
(OPTIONAL 2ND RV)




HYDRAULIC CIRCUIT 109

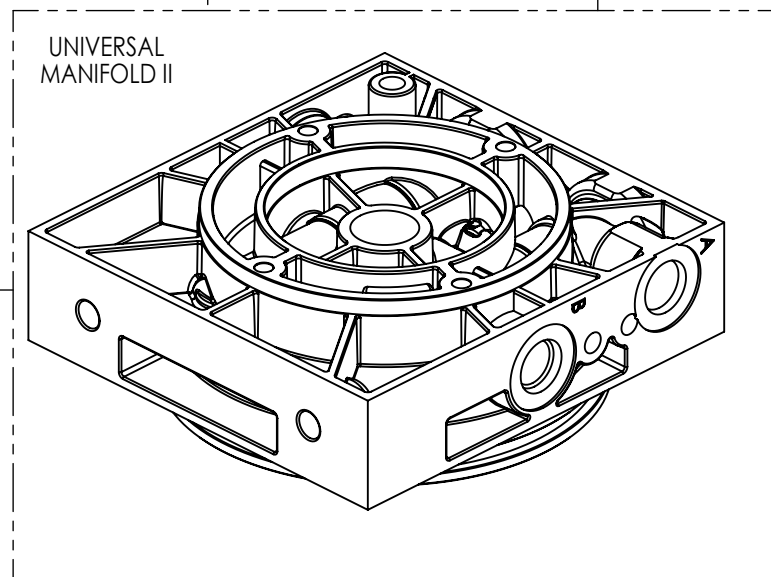


HYDRAULIC CIRCUIT 114A




HYDRAULIC CIRCUIT 110




HYDRAULIC CIRCUIT 114





HYDRAULIC CIRCUIT 111

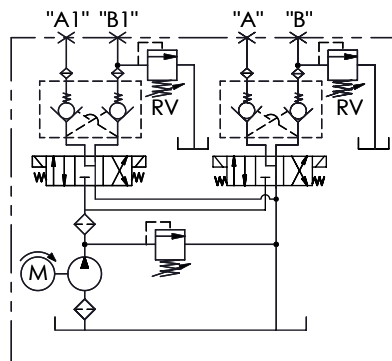


HYDRAULIC CIRCUIT 208

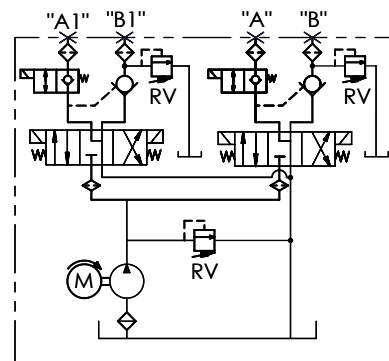


HYDRAULIC CIRCUIT 211

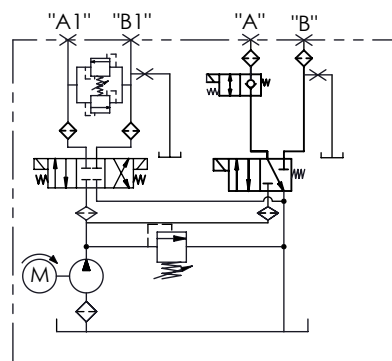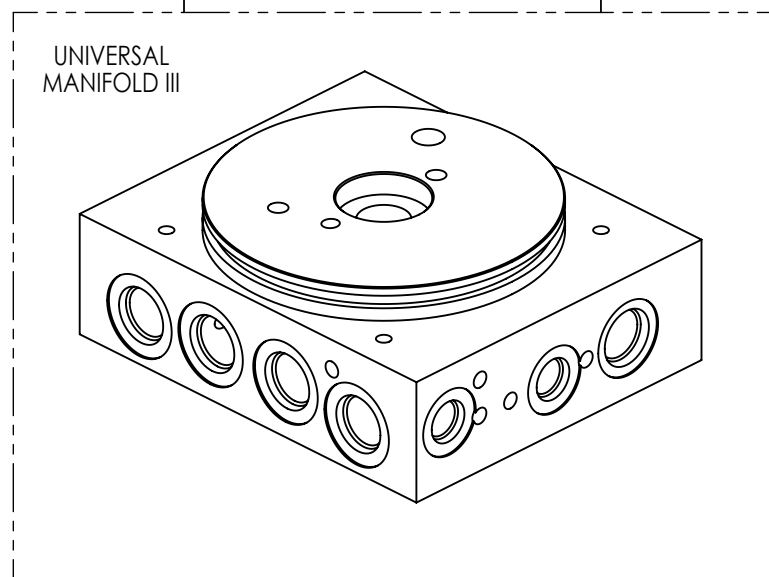


HYDRAULIC CIRCUIT 216  
 (SNOW PLOW)

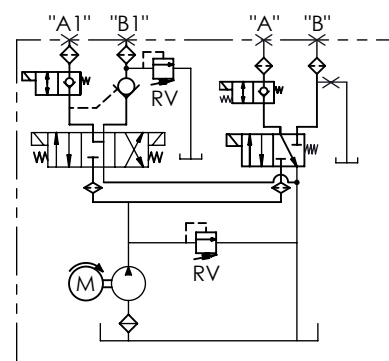


HYDRAULIC CIRCUIT 215



**HYDRAULIC CIRCUIT 101**

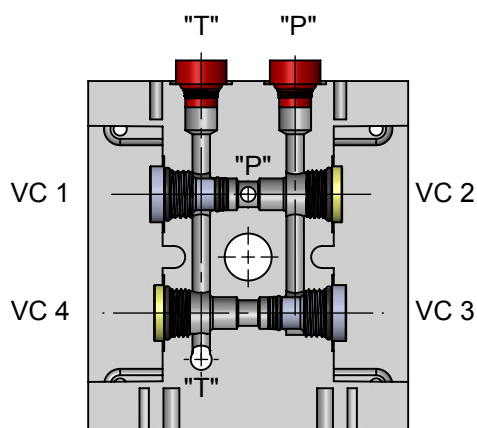

CAVITY 1: VALVE CAVITY PLUG  
CAVITY 2: VALVE PLUG  
CAVITY 3: VALVE CAVITY PLUG  
CAVITY 4: VALVE PLUG

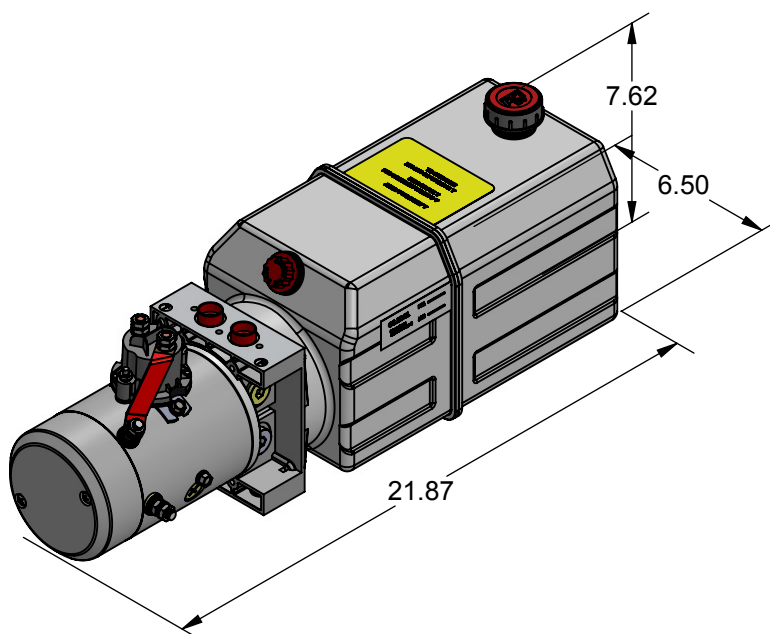

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 101:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
1	1
5.8	0.3593

**RESERVOIR**


PLASTIC RESERVOIR  
3 QT-----14 QT  
  
STEEL RESERVOIR  
1.5 QT-----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH



**HYDRAULIC CIRCUIT 102**

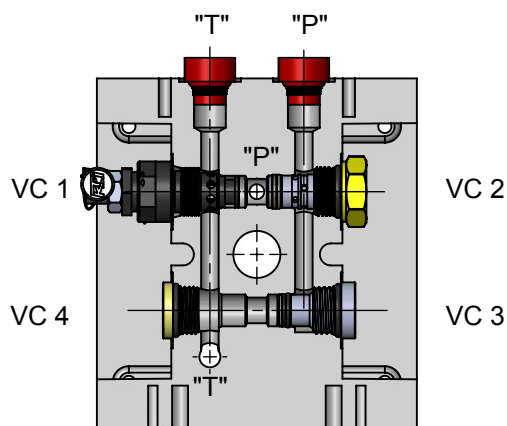

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: VALVE CAVITY PLUG  
CAVITY 4: VALVE PLUG

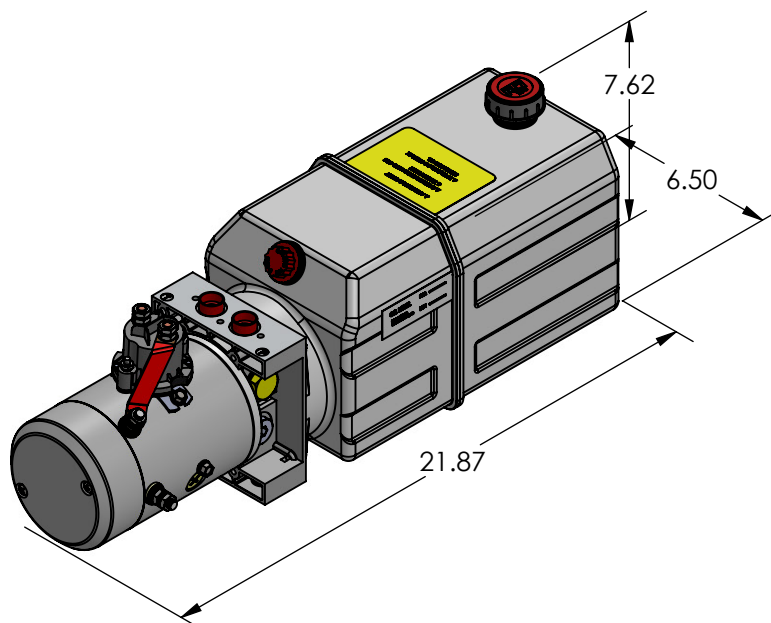

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 102:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**


PLASTIC RESERVOIR  
3 QT-----14 QT  
  
STEEL RESERVOIR  
1.5 QT-----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH



**HYDRAULIC CIRCUIT 102A**

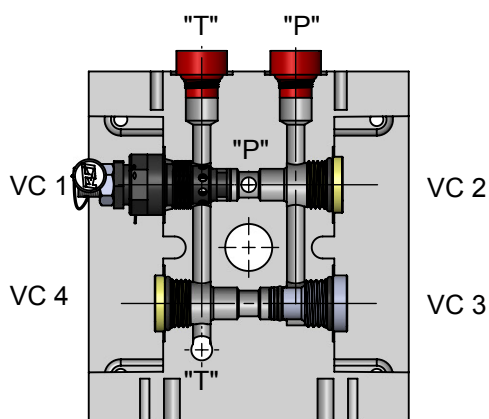

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: VALVE PLUG  
CAVITY 3: VALVE CAVITY PLUG  
CAVITY 4: VALVE PLUG

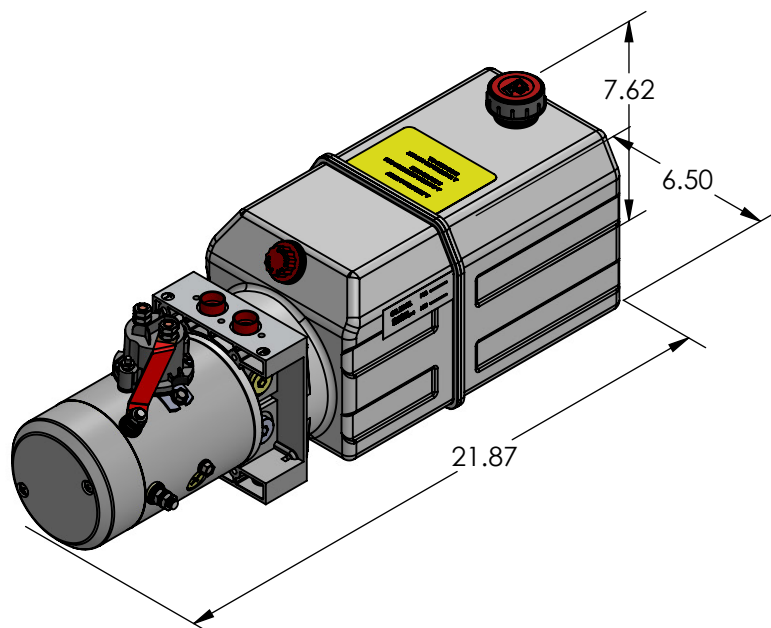

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 102A:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT----14 QT  
  
STEEL RESERVOIR  
1.5 QT----20 QT


**MOUNTING**

HORIZONTAL  
VERTICAL


**MISC**

DC START SWITCH






**HYDRAULIC CIRCUIT 102B**

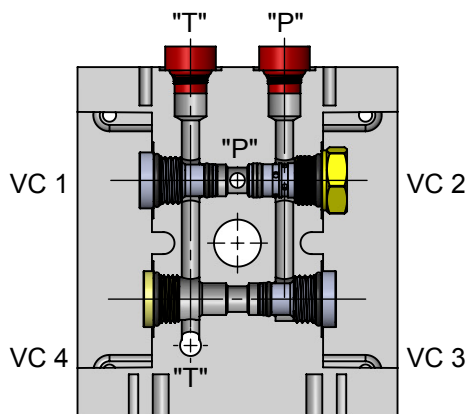

CAVITY 1: VALVE CAVITY PLUG  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: VALVE CAVITY PLUG  
CAVITY 4: VALVE PLUG

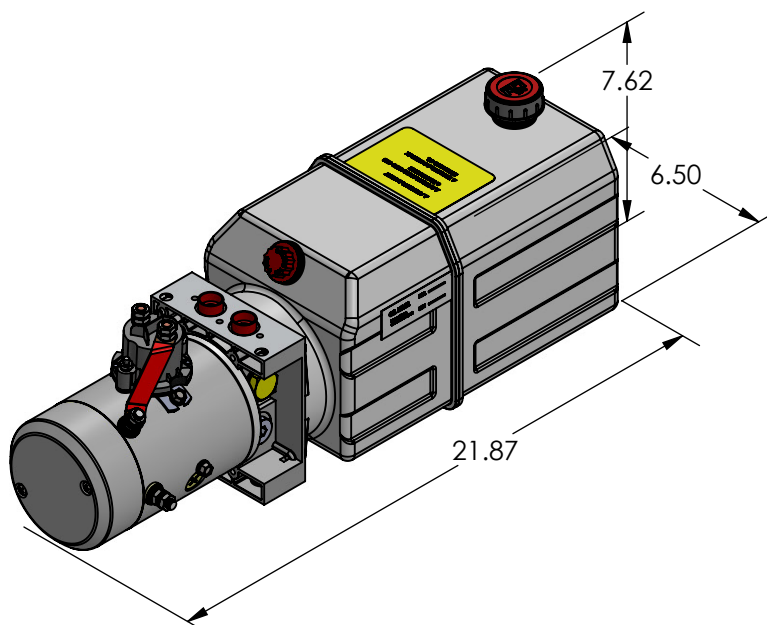

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 102B:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT----14 QT  
  
STEEL RESERVOIR  
1.5 QT----20 QT


**MOUNTING**

HORIZONTAL  
VERTICAL


**MISC**

DC START SWITCH






**HYDRAULIC CIRCUIT 103**

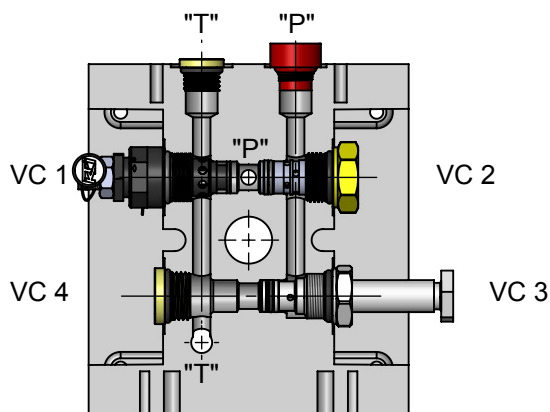

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: NC 2W2P SOLENOID VALVE  
CAVITY 4: VALVE PLUG

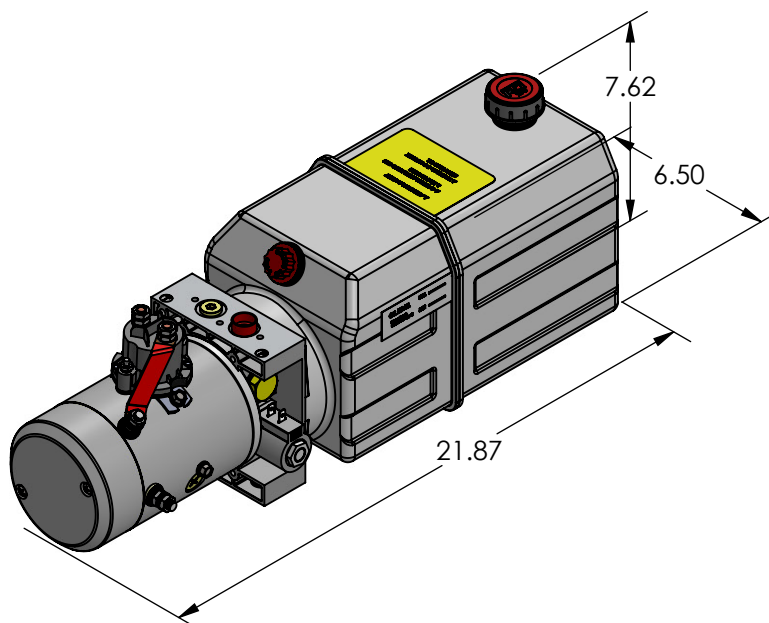

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 103:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
1	1
5.8	0.3593

**RESERVOIR**


PLASTIC RESERVOIR  
3 QT----14 QT  
  
STEEL RESERVOIR  
1.5 QT----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH  
REMOTE PENDANT



**HYDRAULIC CIRCUIT 103A**

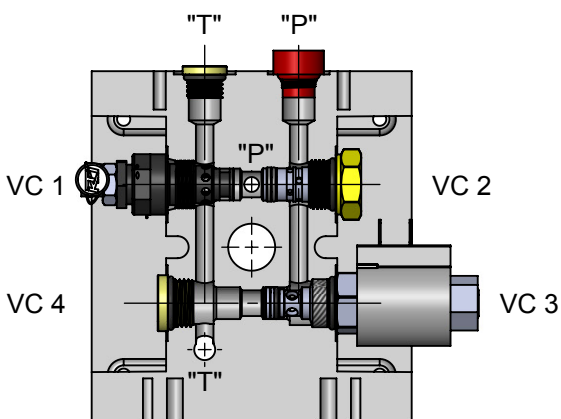

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: NO 2W2P SOLENOID VALVE  
CAVITY 4: VALVE PLUG

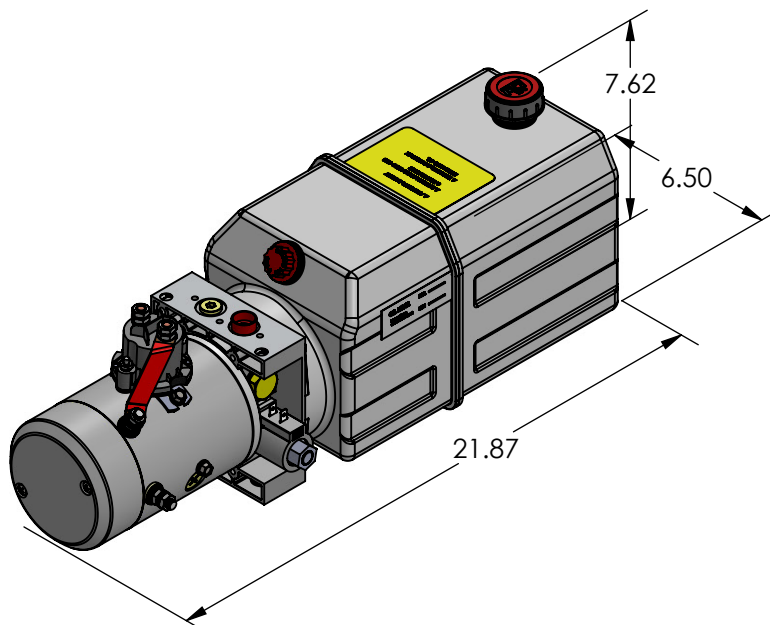

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 103A:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**


PLASTIC RESERVOIR  
3 QT----14 QT  
  
STEEL RESERVOIR  
1.5 QT----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH  
REMOTE PENDANT



**HYDRAULIC CIRCUIT 104A**

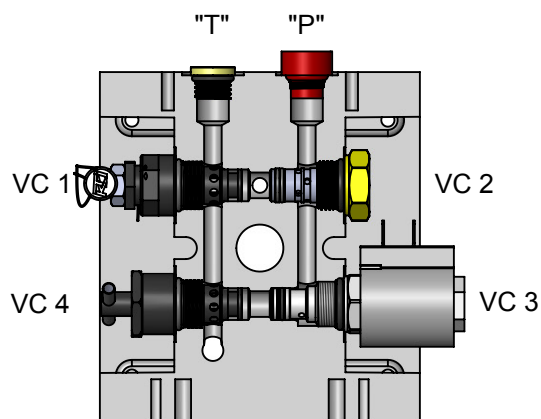

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: NC 2W2P SOLENOID VALVE  
CAVITY 4: ADJUSTABLE FLOW CONTROL VALVE

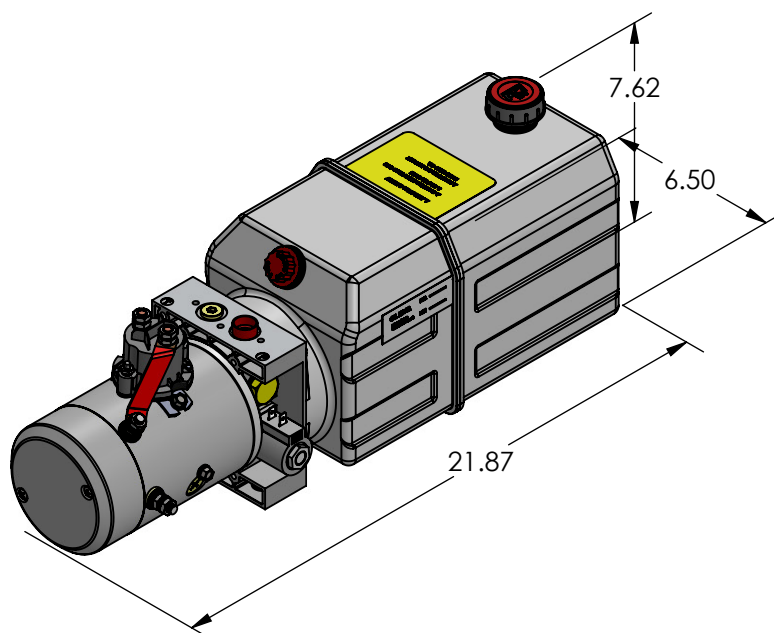

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 104A:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH  
REMOTE PENDANT



**HYDRAULIC CIRCUIT 104B**

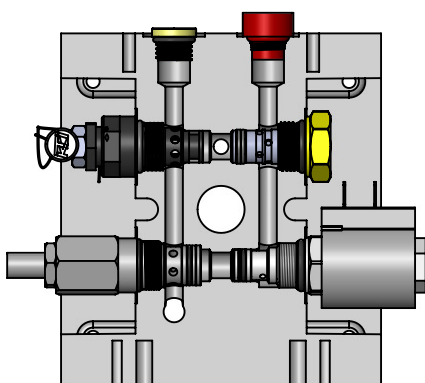

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: NC 2W2P SOLENOID VALVE  
CAVITY 4: PRESSURE COMPENSATED  
ADJUSTABLE FLOW CONTROL  
VALVE

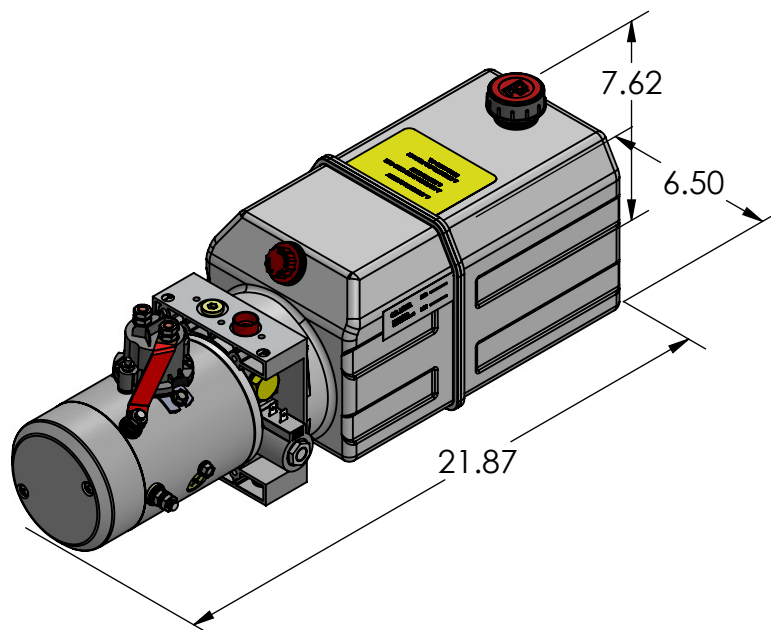

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 104B:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

**MOUNTING**

HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH  
REMOTE PENDANT



**HYDRAULIC CIRCUIT 105**

**DESCRIPTION:**

KTI Universal Manifold I, Hydraulic Circuit 105.  
Base lift, check, and manual lowering valve.  
Motor, KTI Universal Manifold I® (with cartridge relief valve, cartridge check valve, manual operate NC 2 way valve), Pump, Tank.  
"P" & "T" SAE #6(9/16-18) O-ring ports.

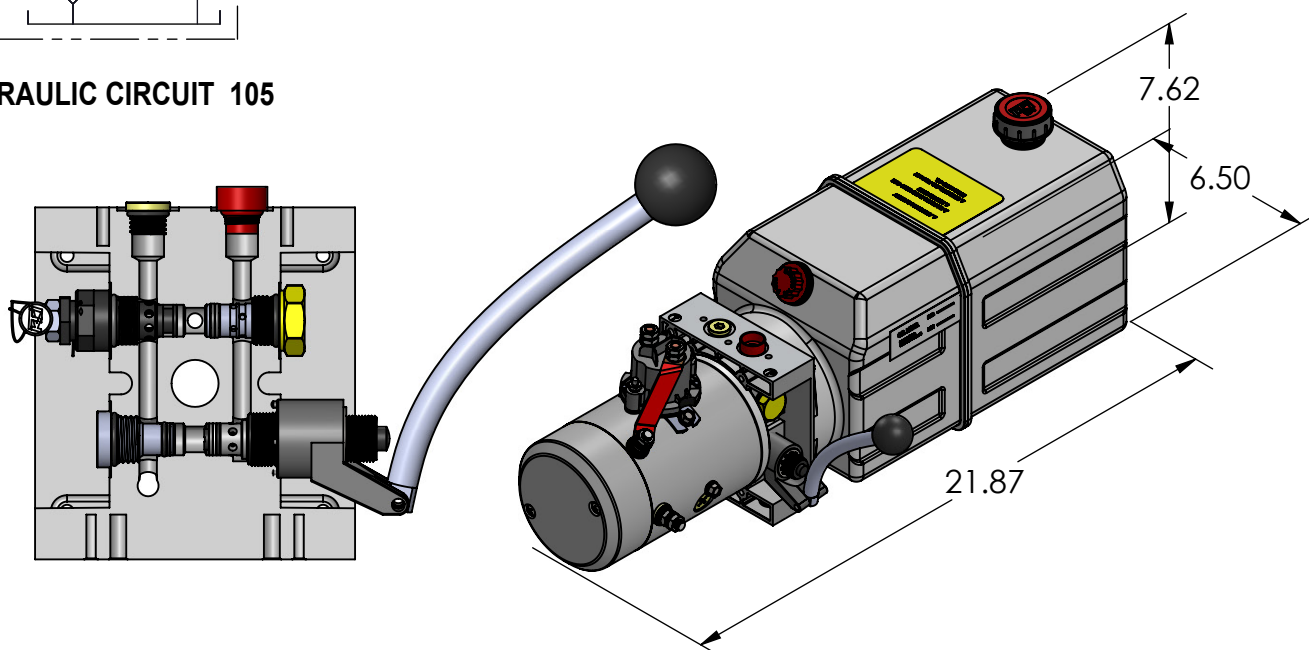

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: MANUAL LOWERING VALVE  
CAVITY 4: 2WAY VALVE CAVITY PLUG

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 105:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**


PLASTIC RESERVOIR	STEEL RESERVOIR
3 QT-----14 QT	1.5 QT-----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**

DC START SWITCH



**HYDRAULIC CIRCUIT 106**

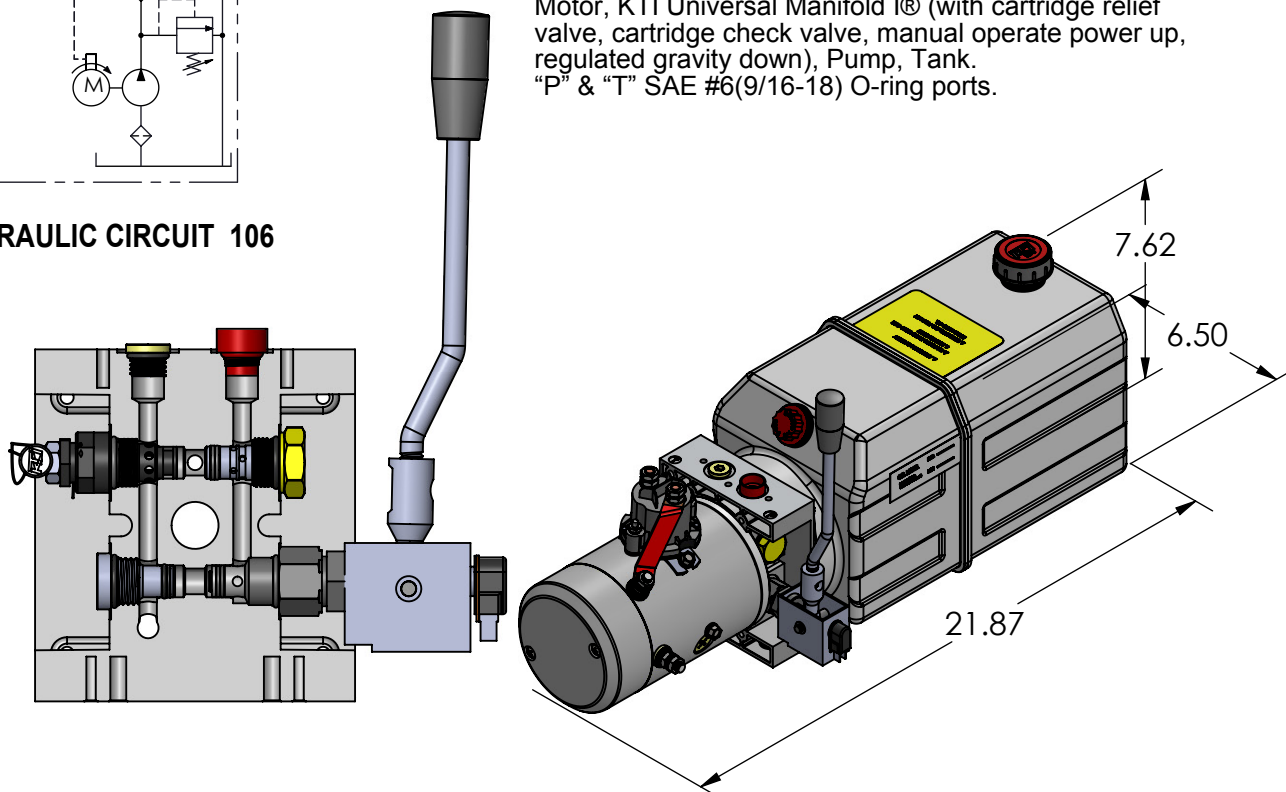

**DESCRIPTION:**

KTI Universal Manifold I, Hydraulic Circuit 106.  
Base lift, check, and manual three position valve.  
Motor, KTI Universal Manifold I® (with cartridge relief valve, cartridge check valve, manual operate power up, regulated gravity down), Pump, Tank.  
"P" & "T" SAE #6(9/16-18) O-ring ports.

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: CARTRIDGE CHECK VALVE  
CAVITY 3: MANUAL OPERATE POWER UP,  
GRAVITY DOWN VALVE  
CAVITY 4: 2WAY VALVE CAVITY PLUG

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD I®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC

**HYDRAULIC CIRCUIT 106:**

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC  
OD 5.0" 12/24V DC  
1/2 HP--3 HP AC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT-----14 QT  
  
STEEL RESERVOIR  
1.5 QT-----20 QT


**MOUNTING**

HORIZONTAL  
VERTICAL


**MISC**

DC START SWITCH






HYDRAULIC CIRCUIT 108  
(OPTIONAL 2ND RV)

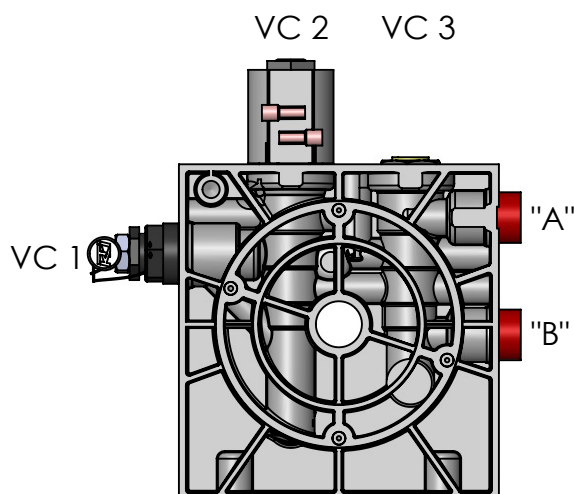

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: 4W2P DIRECTION VALVE  
CAVITY 3: DUAL PILOT OPERATED CHECK VALVE  
CAVITY 4: (OPTIONAL 2ND RELIEF VALVE)

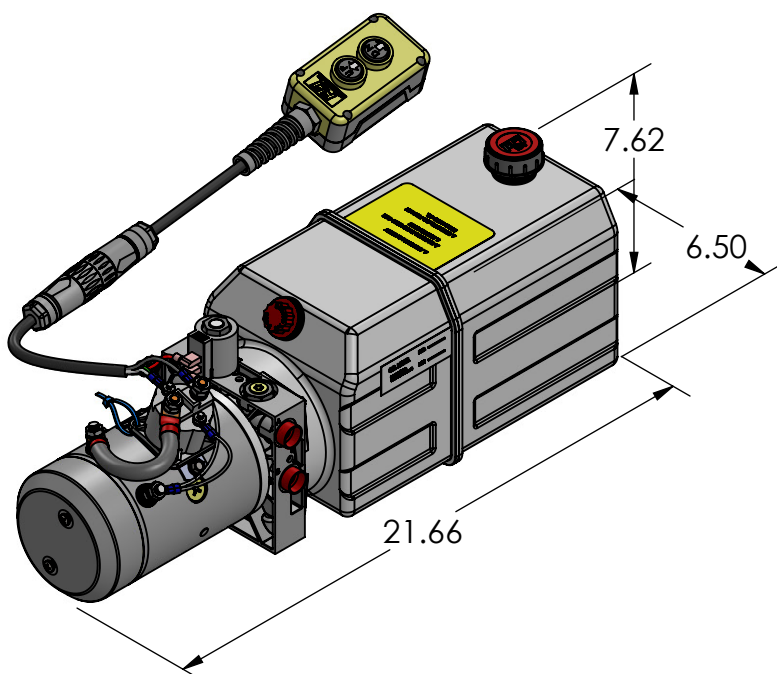

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD II®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC  
2 BUTTON REMOTE PENDANT W/QD

#### HYDRAULIC CIRCUIT 108:

##### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

##### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

##### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

##### MOUNTING


HORIZONTAL  
VERTICAL

##### MISC


DC START SWITCH  
REMOTE PENDANT



HYDRAULIC CIRCUIT 109

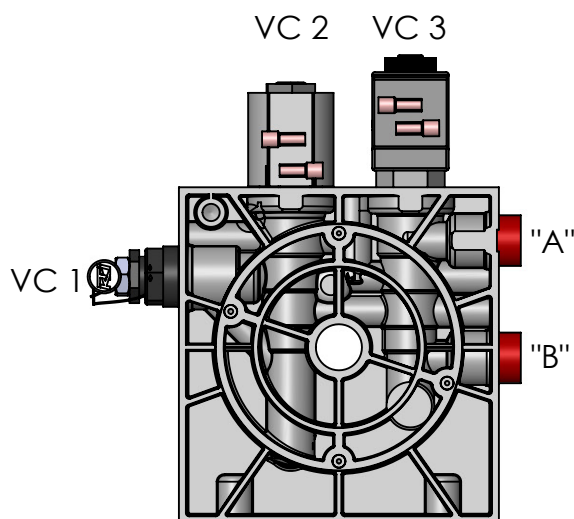

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: 4W2P DIRECTION VALVE  
CAVITY 3: NC 2W VALVE  
CAVITY 4: PLUG

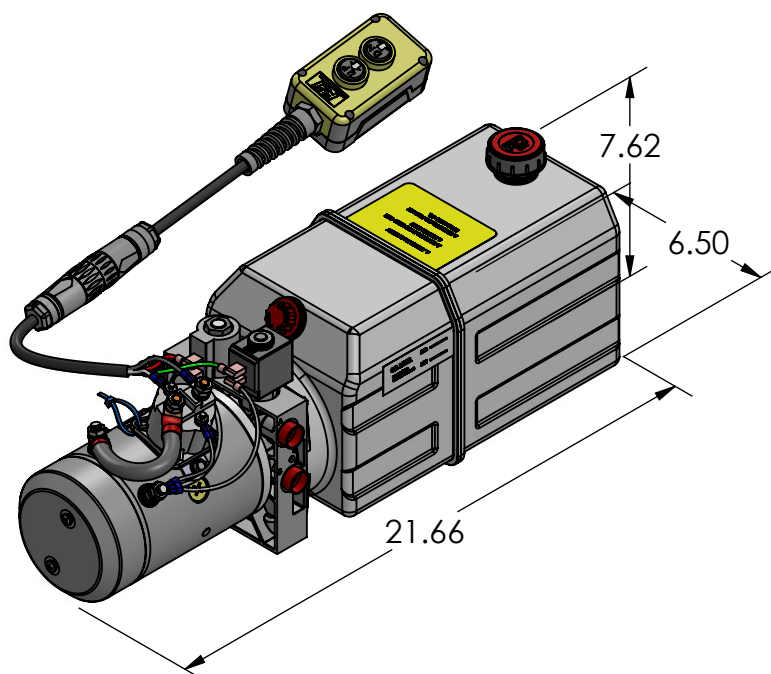

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD II®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC  
2 BUTTON REMOTE PENDANT W/QD

HYDRAULIC CIRCUIT 109:

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT-----14 QT

STEEL RESERVOIR  
1.5 QT-----20 QT


**MOUNTING**

HORIZONTAL  
VERTICAL


**MISC**

DC START SWITCH  
REMOTE PENDANT






HYDRAULIC CIRCUIT 110

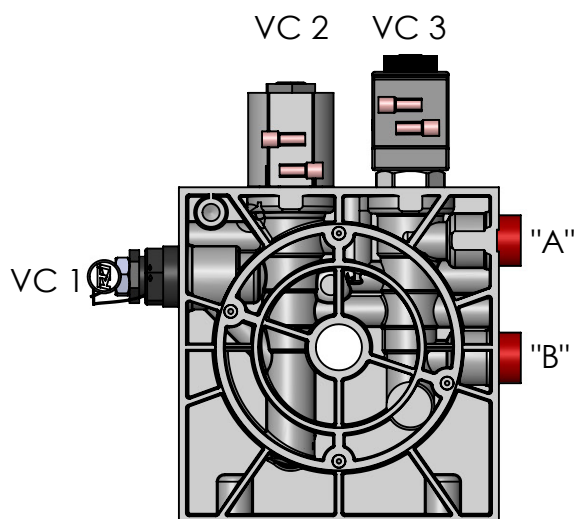

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: 4W2P DIRECTION VALVE  
CAVITY 3: KTI PROPRIETARY LOAD HOLDING VALVE  
CAVITY 4: PLUG

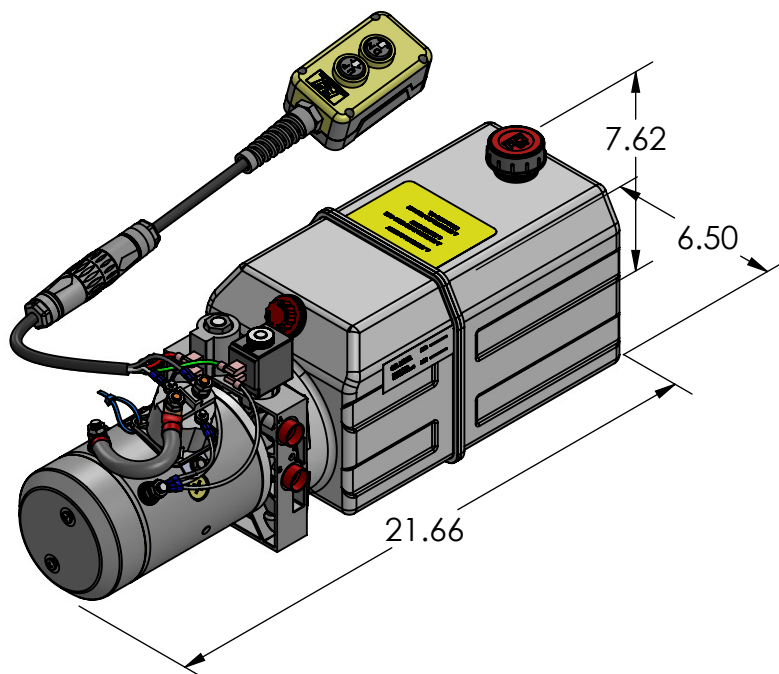

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD II®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC  
2 BUTTON REMOTE PENDANT W/QD

#### HYDRAULIC CIRCUIT 110:

##### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

##### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

##### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

##### MOUNTING


HORIZONTAL  
VERTICAL

##### MISC


DC START SWITCH  
REMOTE PENDANT



HYDRAULIC CIRCUIT 111

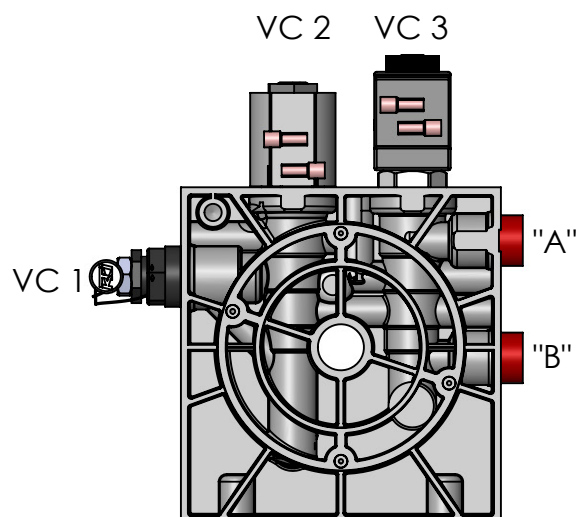

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: 4W2P DIRECTION VALVE  
CAVITY 3: KTI PROPRIETARY LOAD HOLDING VALVE  
CAVITY 4: 2ND RELIEF VALVE

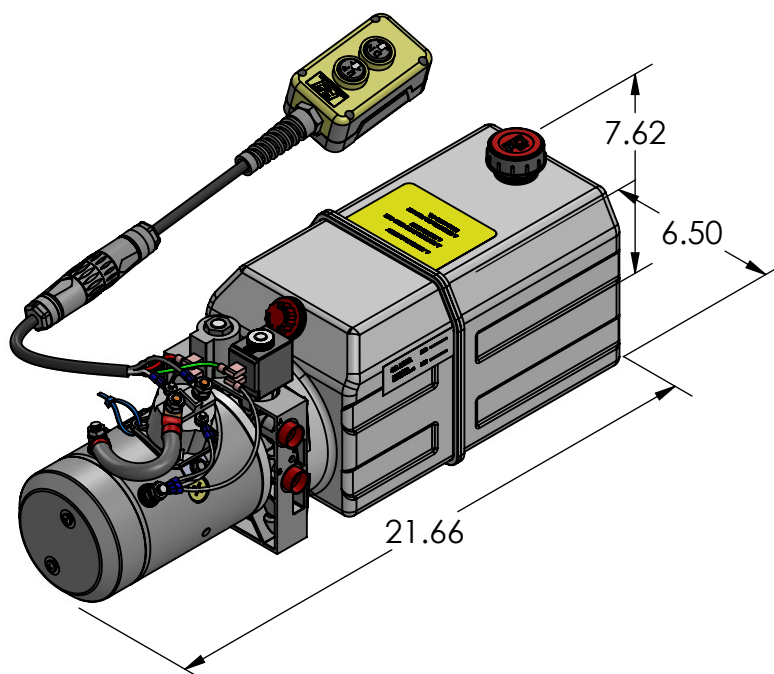

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD II®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC  
2 BUTTON REMOTE PENDANT W/QD

#### HYDRAULIC CIRCUIT 111:

##### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

##### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

##### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

##### MOUNTING

HORIZONTAL  
VERTICAL

##### MISC


DC START SWITCH  
REMOTE PENDANT




HYDRAULIC CIRCUIT 114

### DESCRIPTION:

KTI Universal Manifold II, Hydraulic Circuit 114.  
Double acting circuit for power up, power down operation.  
Motor, KTI Universal Manifold II® (with cartridge relief valve, 4w2p valve, 4w cavity plug), Pump, Tank.  
"A" & "B" SAE #6(9/16-18) O-ring ports.

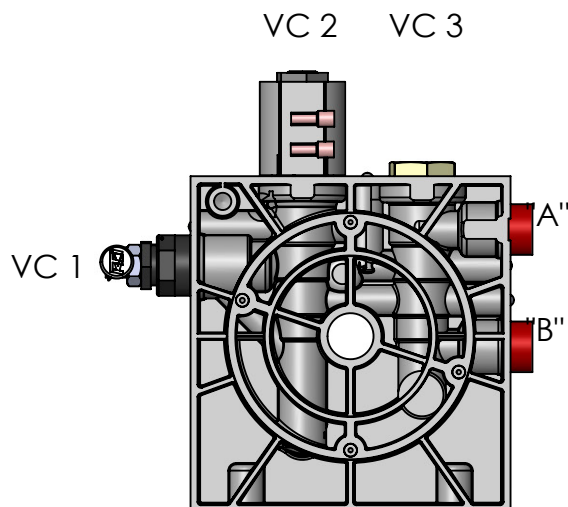

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: 4W2P DIRECTION VALVE  
CAVITY 3: 4W CAVITY PLUG  
CAVITY 4: PLUG

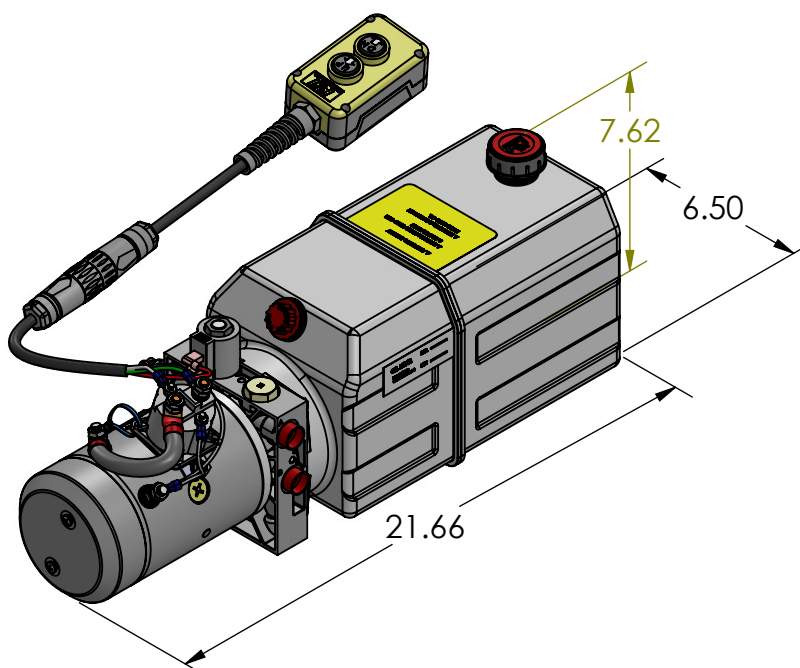

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD II®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC  
2 BUTTON REMOTE PENDANT W/QD

### HYDRAULIC CIRCUIT 114:

#### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

#### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

#### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

#### MOUNTING


HORIZONTAL  
VERTICAL

#### MISC


DC START SWITCH  
REMOTE PENDANT



HYDRAULIC CIRCUIT 114A

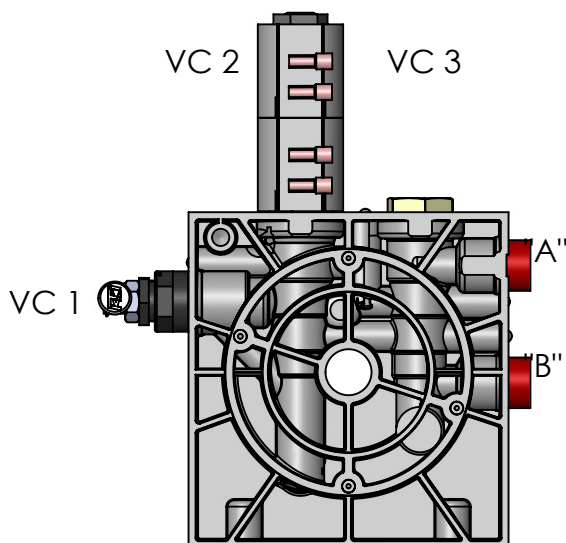

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: 4W3P MOTOR CENTER VALVE  
CAVITY 3: 4W CAVITY PLUG  
CAVITY 4: PLUGGED

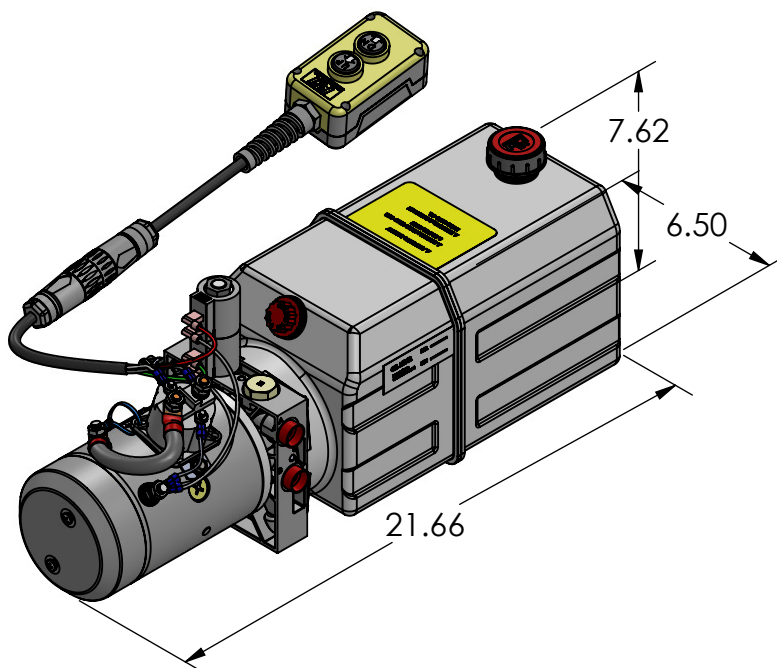

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI UNIVERSAL MANIFOLD II®.  
PUMP: PL SERIES  
RESERVOIR: 6 QT PLASTIC  
2 BUTTON REMOTE PENDANT W/QD

HYDRAULIC CIRCUIT 114A:

**MOTOR**

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

**PUMP**

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

**RESERVOIR**

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

**MOUNTING**


HORIZONTAL  
VERTICAL

**MISC**


DC START SWITCH  
REMOTE PENDANT

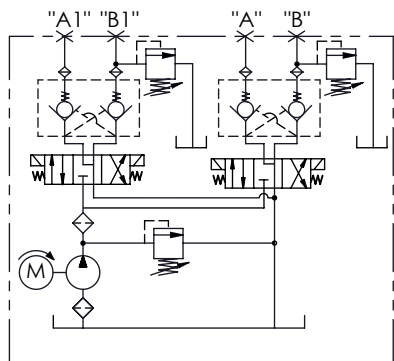

HYDRAULIC CIRCUIT 208

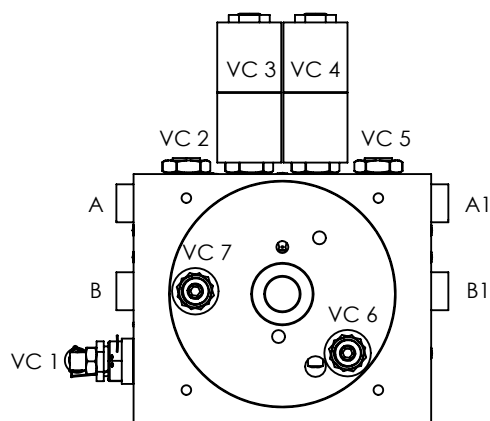

VIEW FROM RESERVOIR SIDE

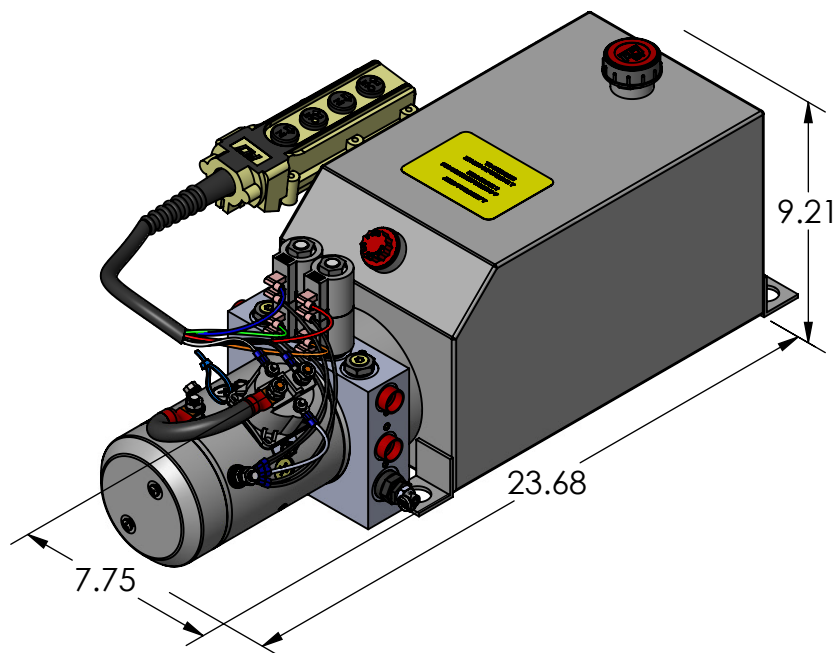

### DESCRIPTION:

KTI Universal Manifold III, Hydraulic Circuit 208.  
Dual double acting circuit for dual independent double acting operation.

Motor, KTI Manifold® (with cartridge relief valve, dual pilot operated check valve, 4w3p motor center cartridge solenoid valve, secondary relief valve), Pump, Tank.  
"A" & "B" "A1" & "B1" SAE #6(9/16-18) O-ring ports.

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: DUAL PILOT OPERATED CHECK VALVE  
CAVITY 3: 4W3P MOTOR CENTER VALVE  
CAVITY 4: 4W3P MOTOR CENTER VALVE  
CAVITY 5: DUAL PILOT OPERATED CHECK VALVE  
CAVITY 6: 2ND RELIEF VALVE  
CAVITY 7: 2ND RELIEF VALVE

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI MANIFOLD III®.  
PUMP: PL SERIES  
RESERVOIR: 12 QT STEEL  
4 BUTTON REMOTE PENDANT

### HYDRAULIC CIRCUIT 208:

#### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

#### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

#### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT

STEEL RESERVOIR  
1.5 QT-----20 QT


#### MOUNTING

HORIZONTAL  
VERTICAL


#### MISC

DC START SWITCH  
REMOTE PENDANT



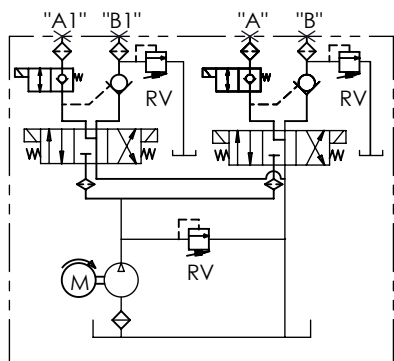

HYDRAULIC CIRCUIT 211

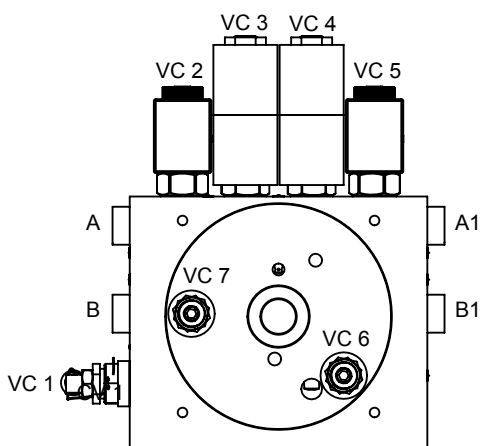

VIEW FROM RESERVOIR SIDE

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: KTI PROPRIETARY LOAD HOLDING VALVE  
CAVITY 3: 4W3P MOTOR CENTER, CARTRIDGE SOLENOID VALVE  
CAVITY 4: 4W3P MOTOR CENTER, CARTRIDGE SOLENOID VALVE  
CAVITY 5: KTI PROPRIETARY LOAD HOLDING VALVE  
CAVITY 6: 2ND RELIEF VALVE  
CAVITY 7: 2ND RELIEF VALVE

#### HYDRAULIC CIRCUIT 211:

##### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

##### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

##### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT  
  
STEEL RESERVOIR  
1.5 QT-----20 QT

##### MOUNTING

HORIZONTAL  
VERTICAL


##### MISC

DC START SWITCH  
REMOTE PENDANT

#### DESCRIPTION:


KTI Universal Manifold III, Hydraulic Circuit 211.  
Dual double acting circuit for dual independent double acting operation.

Motor, KTI Manifold® (with cartridge relief valve, KTI proprietary load holding valve, 4w3p motor center cartridge solenoid valve, secondary relief valve), Pump, Tank.  
"A" & "B" "A1" & "B1" SAE #6(9/16-18) O-ring ports.

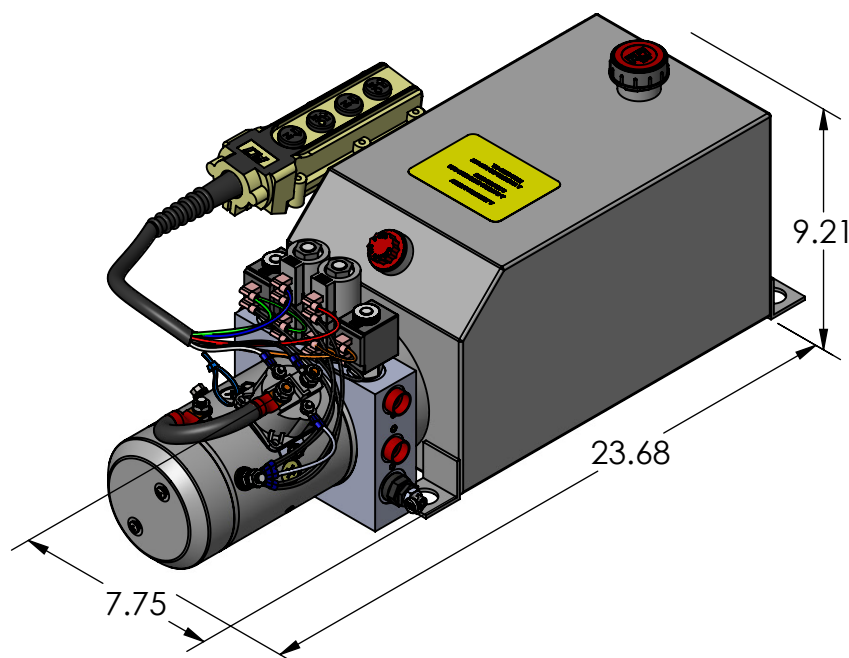


#### AS SHOWN:


MOTOR: 12V DC  
MANIFOLD: KTI MANIFOLD III®.  
PUMP: PL SERIES  
RESERVOIR: 12 QT STEEL  
4 BUTTON REMOTE PENDANT

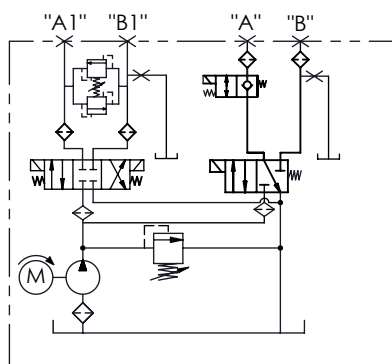

HYDRAULIC CIRCUIT 216

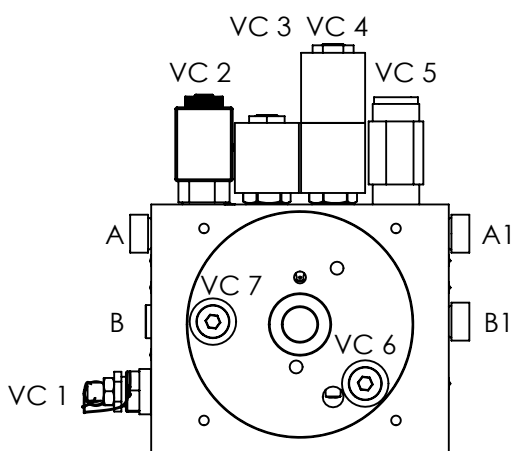

VIEW FROM RESERVOIR SIDE

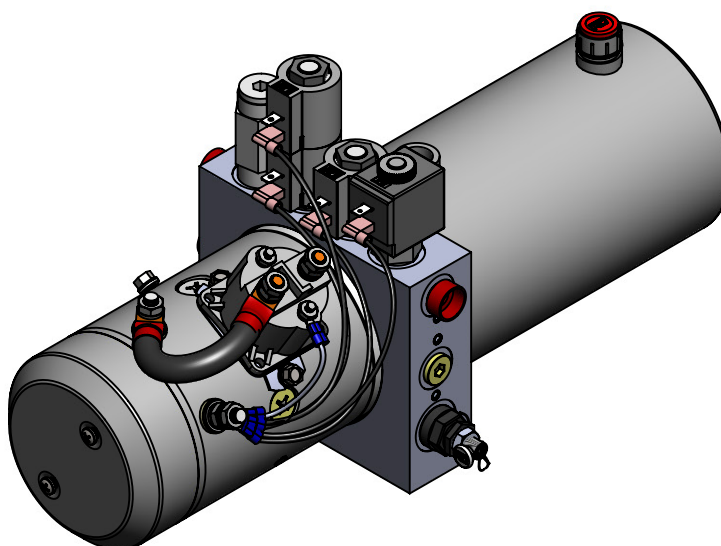

# DESCRIPTION:

KTI Universal Manifold III, Hydraulic Circuit 216. (SNOW PLOW) Power angling, cross over relief w/lift, check, lower & float function.

Motor, KTI Manifold® (with cartridge relief valve, 4w2p spool type valve, 4w3p close center spool valve, adjustable directional, bi-directional relief valve), Pump, Tank.  
"A" & "B" "A1" & "B1" SAE #6(9/16-18) O-ring ports.

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: NC 2WAY VALVE  
CAVITY 3: 4W2P SPOOL TYPE CARTRIDGE SOLENOID VALVE  
CAVITY 4: 4W3P CLOSE CENTER SPOOL TYPE CARTRIDGE SOLENOID VALVE  
CAVITY 5: ADJUSTABLE DIRECTIONAL, BI-DIRECTIONAL RELIEF VALVE  
CAVITY 6: PLUG  
CAVITY 7: PLUG

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI MANIFOLD® III.  
PUMP: PL SERIES  
RESERVOIR: 2 QT STEEL

## HYDRAULIC CIRCUIT 216:

### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT


STEEL RESERVOIR  
1.5 QT-----20 QT

### MOUNTING


HORIZONTAL  
VERTICAL

### MISC


DC START SWITCH

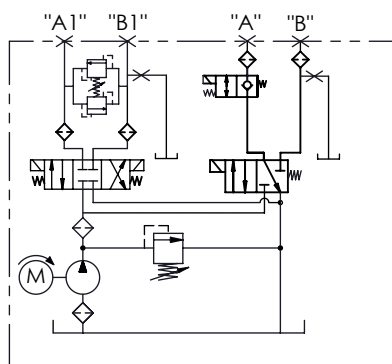

HYDRAULIC CIRCUIT 216

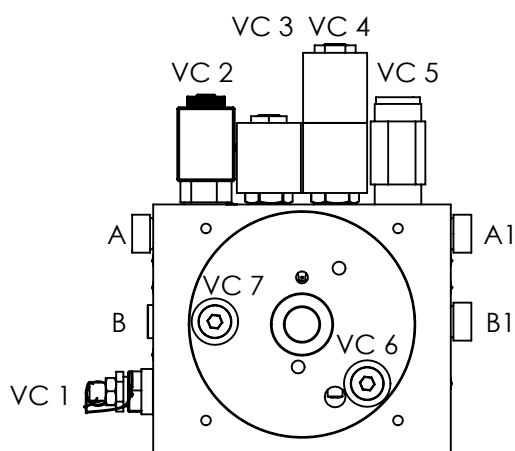

VIEW FROM RESERVOIR SIDE

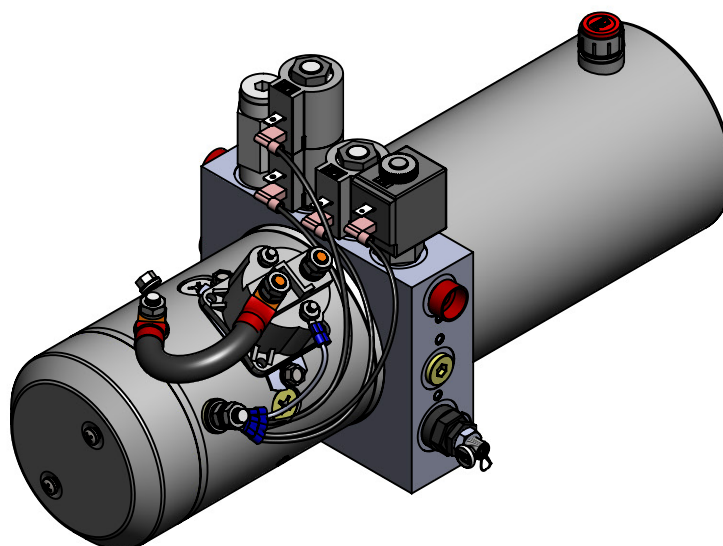

### DESCRIPTION:

KTI Universal Manifold III, Hydraulic Circuit 216. (SNOW PLOW) Power angling, cross over relief w/lift, check, lower & float function.

Motor, KTI Manifold® (with cartridge relief valve, 4w2p spool type valve, 4w3p close center spool valve, adjustable directional, bi-directional relief valve), Pump, Tank.

"A" & "B" "A1" & "B1" SAE #6(9/16-18) O-ring ports.

CAVITY 1: CARTRIDGE RELIEF VALVE  
CAVITY 2: NC 2WAY VALVE  
CAVITY 3: 4W2P SPOOL TYPE CARTRIDGE SOLENOID VALVE  
CAVITY 4: 4W3P CLOSE CENTER SPOOL TYPE CARTRIDGE SOLENOID VALVE  
CAVITY 5: ADJUSTABLE DIRECTIONAL, BI-DIRECTIONAL RELIEF VALVE  
CAVITY 6: PLUG  
CAVITY 7: PLUG

AS SHOWN:  
MOTOR: 12V DC  
MANIFOLD: KTI MANIFOLD® III.  
PUMP: PL SERIES  
RESERVOIR: 2 QT STEEL

### HYDRAULIC CIRCUIT 216:

#### MOTOR

OD 3.0" 12V DC  
OD 4.5" 12/24V DC

#### PUMP

PL	IN <sup>3</sup>
0.6	0.0384
5.8	0.3593

#### RESERVOIR

PLASTIC RESERVOIR  
3 QT-----14 QT

STEEL RESERVOIR  
1.5 QT-----20 QT

#### MOUNTING


HORIZONTAL  
VERTICAL

#### MISC




DC START SWITCH



**DESCRIPTION:**  
KTI 12/24V DC AUXILIARY PUMP & MOTOR ASSEMBLY.




**HYDRAULIC CIRCUIT**

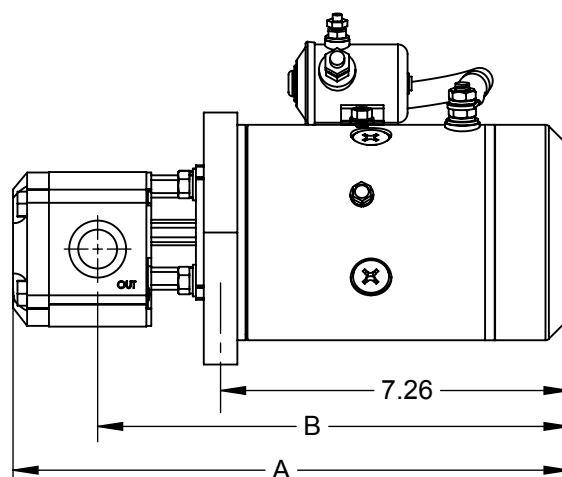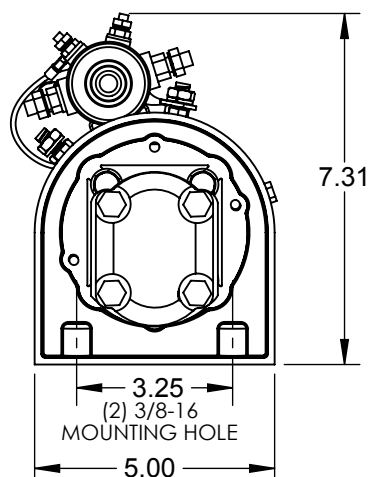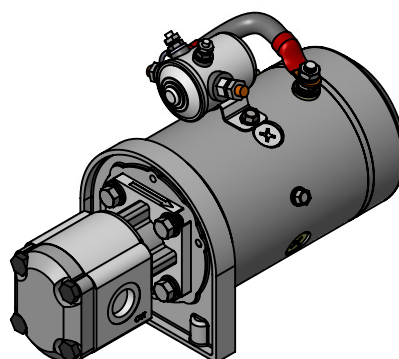




AS SHOWN:  
MOTOR: 12/24V DC 4.5" DIAMETER MOTOR  
STARTER: CONTINUOUS DUTY START SOLENOID  
PUMP: STN PRESSURE LOADED GEAR PUMP

12V DC MODEL NUMBER	24V DC MODEL NUMBER	PUMP DISPL. in <sup>3</sup> /r (mL/r)	DIM A (IN)	DIM B (IN)	INLET	OUTLET
DC 4002	DC 4012	0.083 (1.36)	15.33	9.75	SAE #10 7/8-14	SAE #8 3/4-16
DC 4003	DC 4013	0.125 (2.05)	15.41	9.79		
DC 4004	DC 4014	0.167 (2.74)	15.49	9.84		
DC 4005	DC 4015	0.209 (3.24)	15.57	9.87		
DC 4006	DC 4016	0.250 (4.10)	15.64	9.91		

**DESCRIPTION:**  
KTI 12/24V DC AUXILIARY PUMP & MOTOR ASSEMBLY.



**HYDRAULIC CIRCUIT**

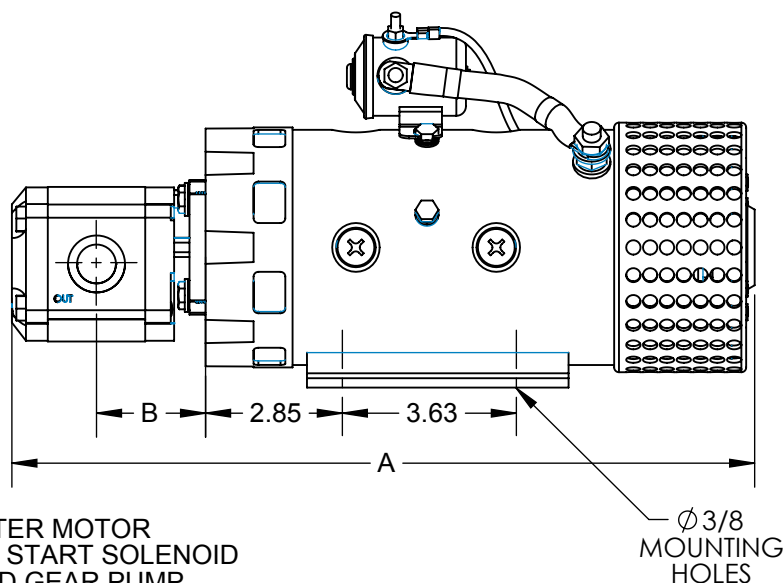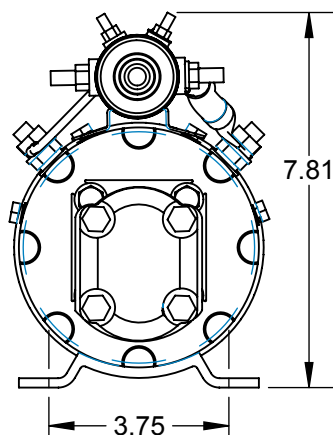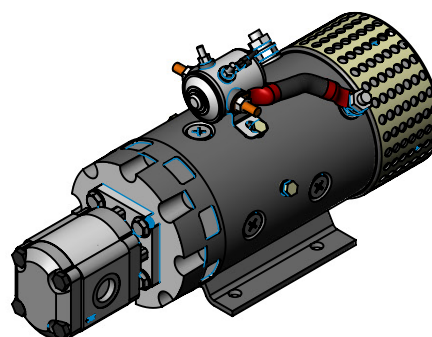


AS SHOWN:  
MOTOR: 12/24V DC 5.0" DIAMETER MOTOR  
STARTER: CONTINUOUS DUTY START SOLENOID  
PUMP: STN PRESSURE LOADED GEAR PUMP



12V DC MODEL NUMBER	24V DC MODEL NUMBER	PUMP DISPL. in <sup>3</sup> /r (mL/r)	DIM A (IN)	DIM B (IN)	INLET	OUTLET
DC 5002	DC 5012	0.083 (1.36)	15.33	2.31	SAE #10 7/8-14	SAE #8 3/4-16
DC 5003	DC 5013	0.125 (2.05)	15.41	2.35		
DC 5004	DC 5014	0.167 (2.74)	15.49	2.40		
DC 5005	DC 5015	0.209 (3.24)	15.57	2.43		
DC 5006	DC 5016	0.250 (4.10)	15.64	2.47		

## DESCRIPTION:



KTI stackable double acting manifold. Each manifold consists of (1) double acting circuit w/ or w/o load holding capabilities. the stackable manifold is for mounting on UM I to create functionally diverse circuits. All connection ports are SAE #6(9/16-18) O-ring ports.




4w3p motor center cartridge solenoid valve  
4way cavity plug

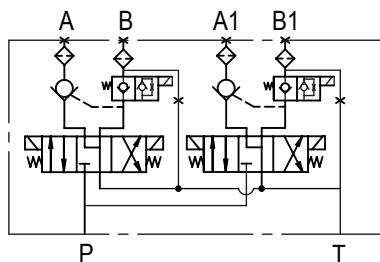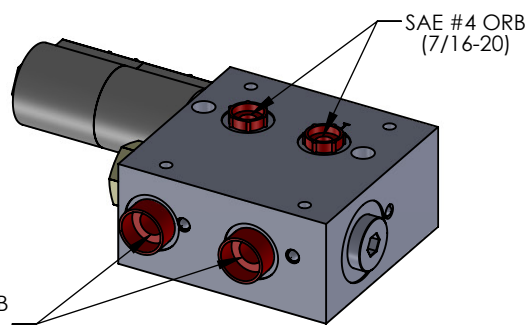

(2) 4w3p motor center cartridge solenoid valve  
(2) KTI proprietary load holding valve

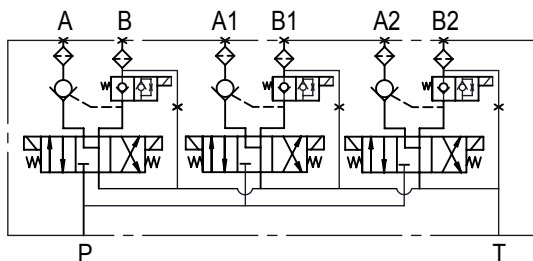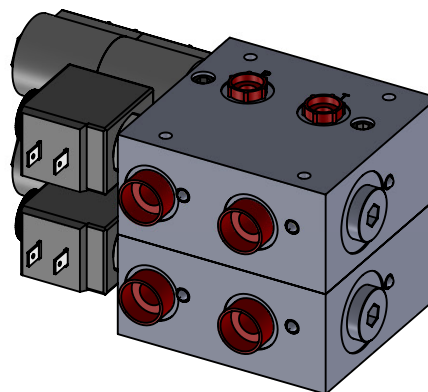

(3) 4w3p motor center cartridge solenoid valve  
(3) KTI proprietary load holding valve


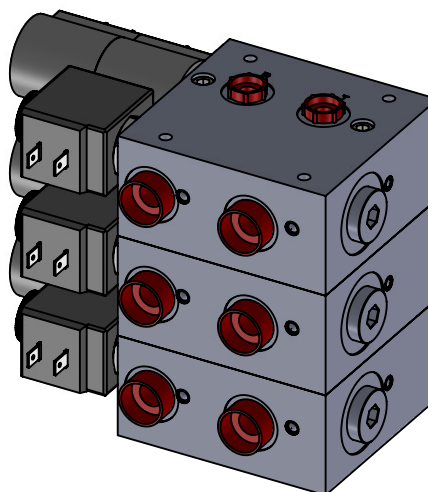




2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

**DESCRIPTION:**

3" O.D. PERMANENT MAGNET MOTOR WITH SPINE SHAFT. THIS MOTOR IS EXCELLENT FOR INTERMITTENT DUTY AND LOW PRESSURE APPLICATION.

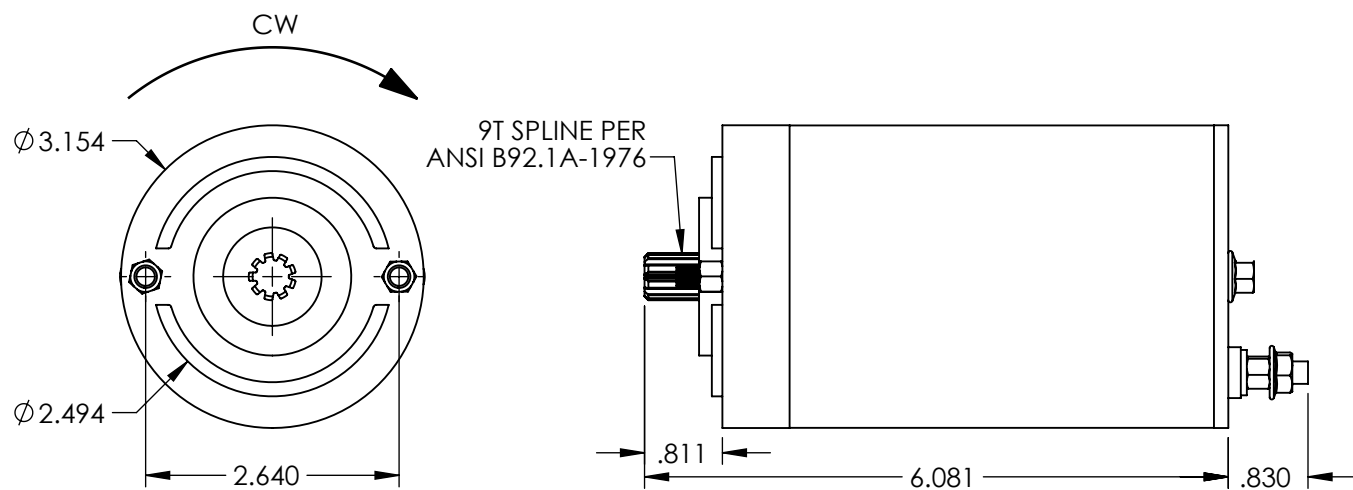
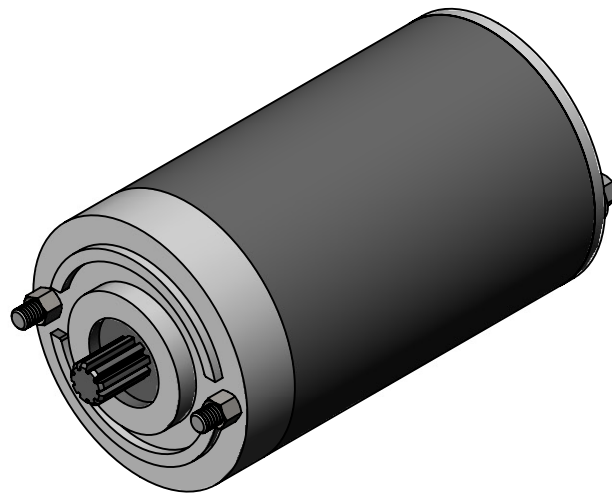




2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

**DESCRIPTION:**

4.5" O.D. 4 FIELDS, SERIES WOUND, HEAVY DUTY 12V & 24V DC ELECTRIC MOTOR.

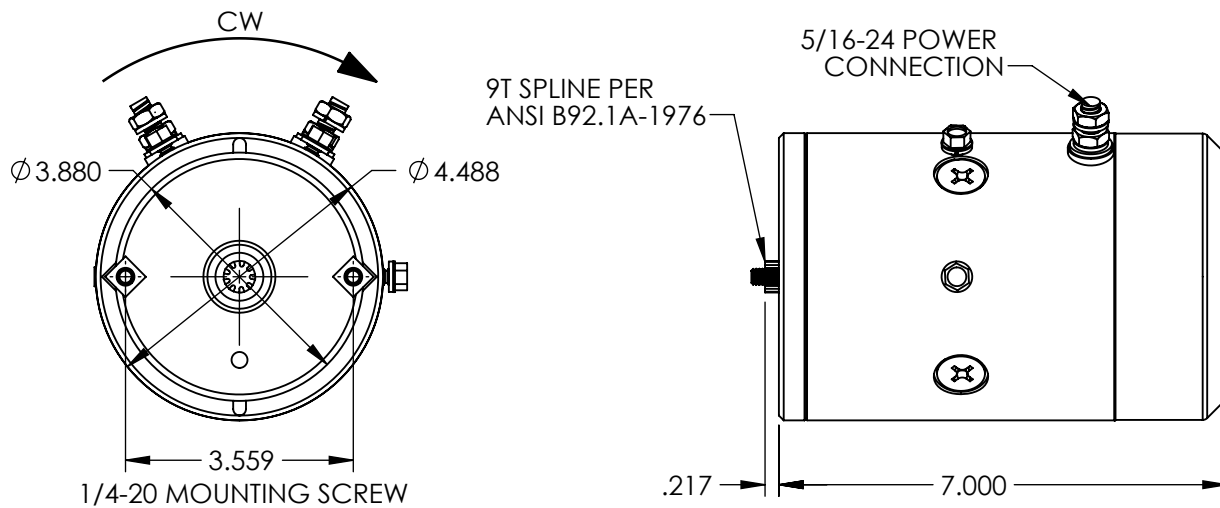
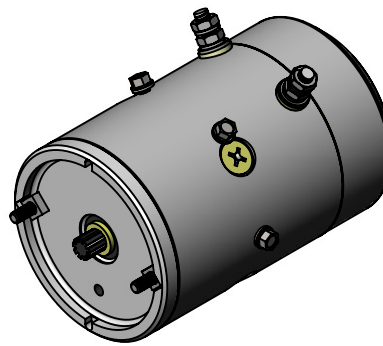




2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

# **DESCRIPTION:**

5.0" O.D. HEAVY DUTY, OPEN END FAN COOLED, 12V & 24V DC ELECTRIC MOTOR. THIS IS FOR CONTINUOUS DUTY, HIGH PRESSURE APPLICATION.

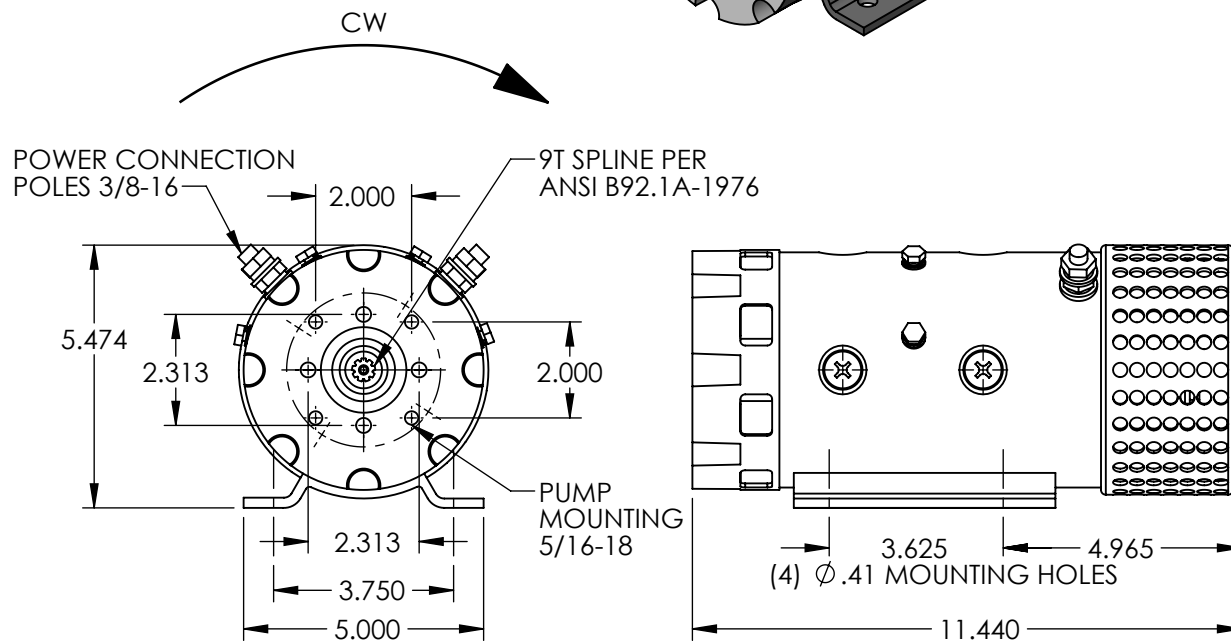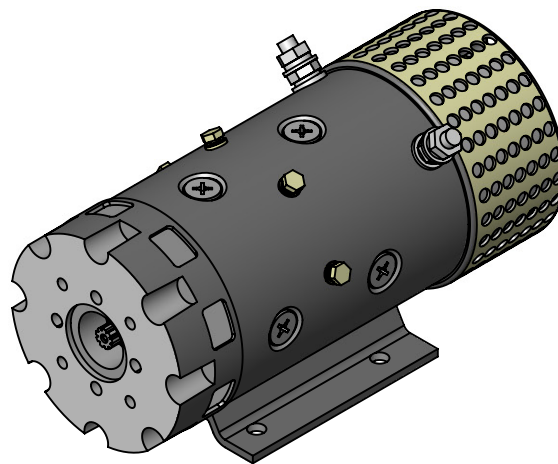



2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

## DESCRIPTION:

KTi Hydraulics Inc uses US made motors for our AC power units. The available power range is from 0.5 HP to 3 HP; single phase to three phase; 1750 to 3450 rpm; 115V, 208V, 230V, 480V AC; 56 frame, C-face, 5/8" dia keyed shaft, CW rotation; Open Drip Proof (ODP), and Totally Enclosed Fan Cooled (TEFC).



KTi P/N	HP	Phz	RPM	Volt	Hz	Endosure
4920-25	0.5	1	1725	115/208-230	60	TEFC
4920-64	0.5	1	1725	110/208-230	60	TEFC
4920-68	0.75	1	1725	115/208-230	60	ODP
4920-69	0.75	1	1725	115/208-230	60	ODP
4920-44	1	1	1750	115/208-230	60	TEFC
4920-72	1	1	1725	115/230	60	ODP
4920-28	1.5	1	1725	115/208-230	60	TEFC
4920-58	1.5	1	1725	115/208-230	60	TEFC
4920-75	2	1	1750	110/208-230	60	TEFC
4920-54	1	1	3450	115/208-230	60	TEFC
4920-80	1	1	3450	115/208-230	60	TEFC
4920-67	1.5	1	3450	115/208-230	60	TEFC
4920-46	2	1	3450	115/208-230	60	TEFC
4920-51	3	1	3450	208-230	60	TEFC




KTi P/N	HP	Phz	RPM	Volt	Hz	Endosure
4920-41	0.5	3	1750	208/230-460	60	TEFC
4920-65	0.5	3	1800	575	60	TEFC
4920-76	1	3	1800	208/230-460	60	TEFC
4920-77	1	3	1800	575	60	TEFC
4920-59	1.5	3	1725	208/230-460	60	TEFC
4920-36	2	3	1750	208/230-460	60	TEFC
4920-71	2	3	1740	208/230-460	60	TEFC
4920-57	1	3	3450	208/230-460	60	TEFC
4920-81	1	3	3450	208/230-460	60	TEFC
4920-73	1	3	3450	575	60	TEFC
4920-34	2	3	3450	208/230-460	60	TEFC
4920-70	2	3	3450	208/230-460	60	TENV
4920-35	3	3	3450	208/230-460	60	TEFC



## DESCRIPTION:

The KTI PL series pressure loaded gear pump consists of a gear pair supported by two aluminum bearing blocks, center housing, front and rear cover. The PL series pump features high mechanical and volumetric efficiency, low noise level as well as high reliability.

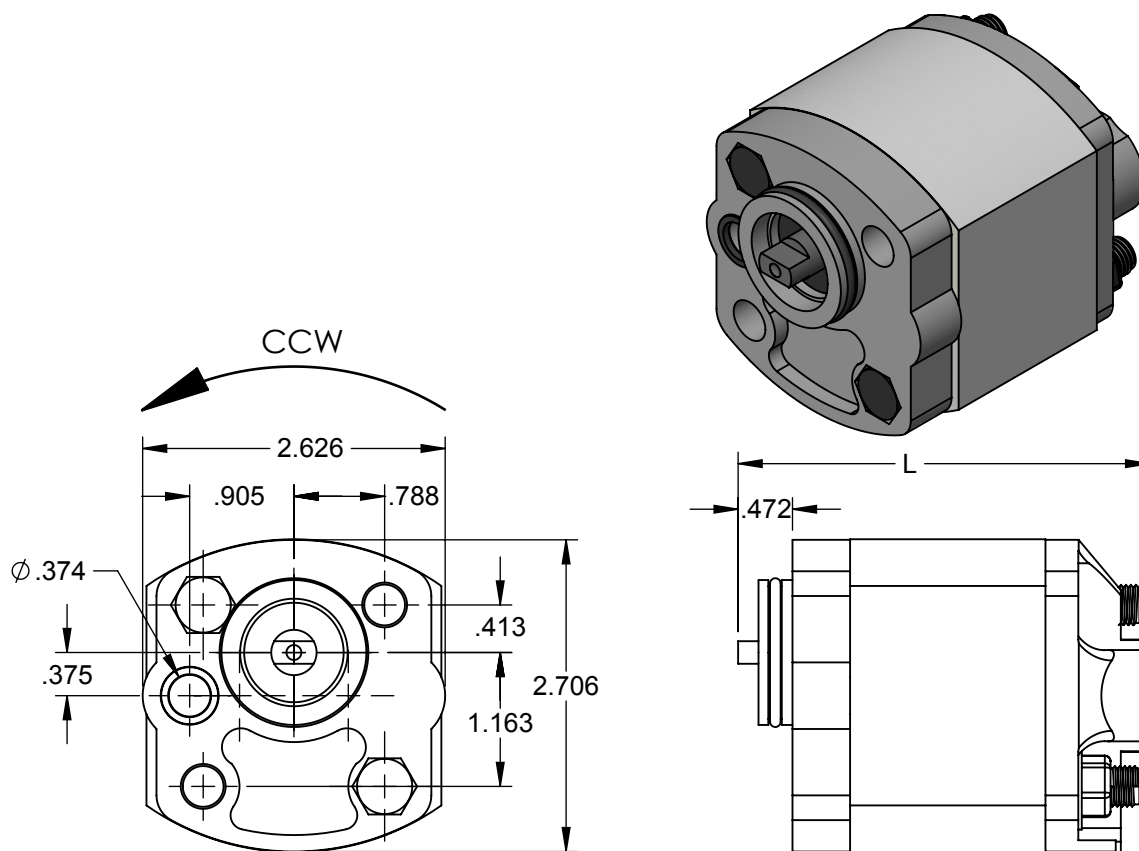

PART NO.	DISPLACEMENT (in <sup>3</sup> /r)	PRESSURE (Bar/PSI)		L(IN)
		RATE	MAX	
PL-0.63	0.038	200/2900	280/4061	3.32
PL-0.80	0.054	200/2900	280/4061	3.36
PL-1.20	0.077	200/2900	280/4061	3.42
PL-1.50	0.090	200/2900	280/4061	3.45
PL-1.60	0.101	200/2900	280/4061	3.48
PL-2.10	0.132	200/2900	280/4061	3.56
PL-2.50	0.152	200/2900	280/4061	3.62
PL-2.70	0.170	200/2900	280/4061	3.66
PL-3.20	0.202	200/2900	280/4061	3.74
PL-4.20	0.263	180/2610	260/3770	3.89
PL-5.10	0.311	138/2000	227/3300	4.01
PL-6.00	0.368	138/2000	227/3300	4.15


## PERFORMANCE:

1. DISPLACEMENT: 0.038-0.368 in<sup>3</sup>/r.
2. WORKING PRESSURE: 2000 PSI, MAX PRESSURE: 4000 PSI.
3. ROTATING DIRECTION: COUNTERCLOCKWISE.



## DESCRIPTION:

The KTI STN series pressure load gear pump consists of a gear pair supported by two aluminum bearing blocks, center housing, front and rear cover with American Standard 4F17 mounting. The STN pump features simple structure, high mechanical and volumetric efficiency, low noise level as well as high reliability. It is widely used in the hydraulic system of truck, lift and transport machinery, mine machinery, and agriculture machinery, etc.

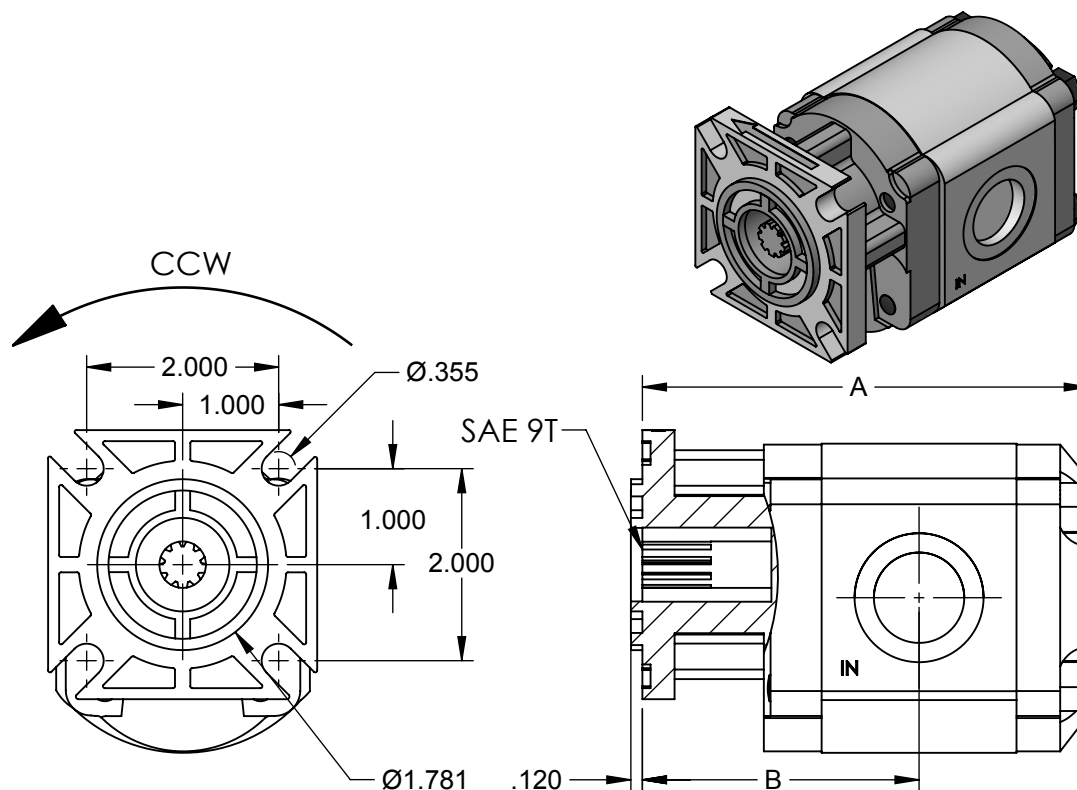

PART NO.	DISPLACEMENT in <sup>4</sup> /r (mL/r)	A(IN)	B(IN)	INLET	OUTLET
STN 2	0.083 (1.36)	3.89	2.31	SAE #10 7/8-14	SAE #8 3/4-16
STN 3	0.125 (2.05)	3.97	2.35		
STN 4	0.167 (2.74)	4.05	2.40		
STN 5	0.209 (3.42)	4.13	2.43		
STN 6	0.250 (4.10)	4.20	2.47		

## PERFORMANCE:


1. DISPLACEMENT: 0.083-0.250 in<sup>3</sup>/r.
2. WORKING PRESSURE: 3626 PSI, MAX PRESSURE: 4050 PSI.
3. ROTATING SPEED: 2000-4000 rpm.
4. ROTATING DIRECTION: COUNTERCLOCKWISE.



2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

# **DESCRIPTION:**

KTI Hydraulics Inc. FDA series gear type flow dividers. These flow dividers takes single hydraulic input, and divides the output into 2 or more equal circuits. Integrated rephrasing valve is standard on all FDA flow dividers.

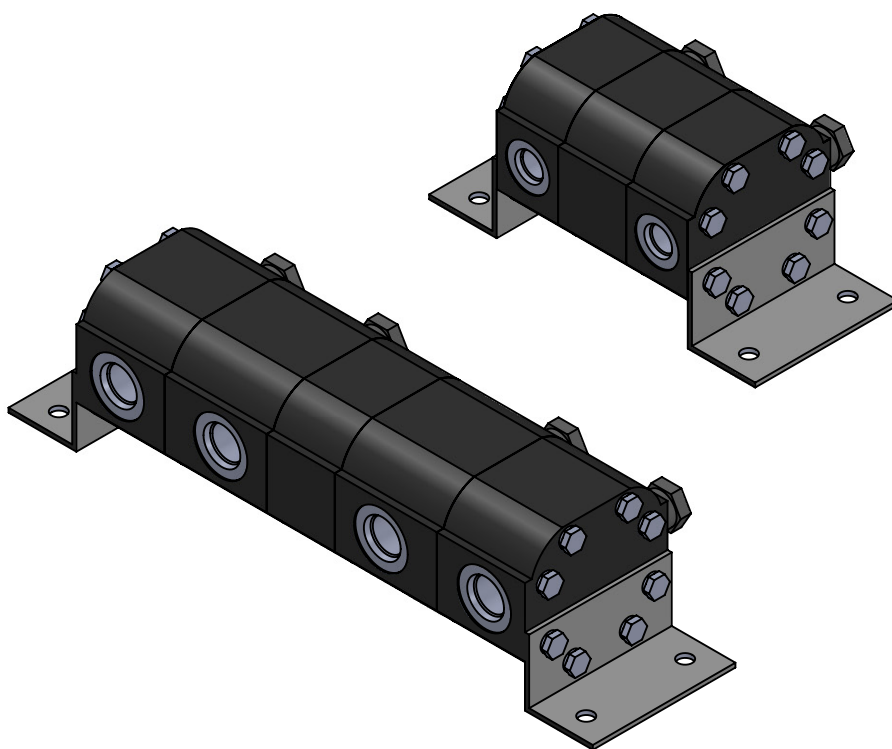




KTI HYDRAULIC INC FDA FLOW DIVIDERS							
PART NO.	DISPLACEMENT PER SECTION	MIN INLET FLOW	STANDARD INLET FLOW	MAXI INLET FLOW	MAXI OUTLET PRESSURE	PORTS	
	IN <sup>3</sup>	750 RPM IN <sup>3</sup> /M	1500 RPM IN <sup>3</sup> /M	3000 RPM IN <sup>3</sup> /M	PSI	SAE INLET	SAE OUTLET
FDA-2R1.0S	0.070	106	211	422	3625	3/4-16	9/16-18
FDA-2R2.1S	0.132	199	397	795			
FDA-2R3.0S	0.194	291	582	1164			
FDA-2R4.2S	0.265	397	794	1589		7/8-14	3/4-16
FDA-2R5.0S	0.298	447	895	1790			
FDA-2R6.3S	0.389	583	1166	2332			
FDA-2R8.8S	0.538	807	1615	3229	3046	3/4-16	9/16-18
FDA-4R2.1S	0.132	397	795	1589			
FDA-4R3.0S	0.194	582	1164	2329			
FDA-4R4.2S	0.265	795	1589	3178		7/8-14	3/4-16
FDA-4R5.0S	0.298	895	1790	3581			
FDA-4R6.3S	0.389	1166	2332	4665			
FDA-4R8.8S	0.538	1615	3229	6459			



2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

# **DESCRIPTION:**

KTI Hydraulics Inc steel, deep drawn reservoir, black powder coated finish.

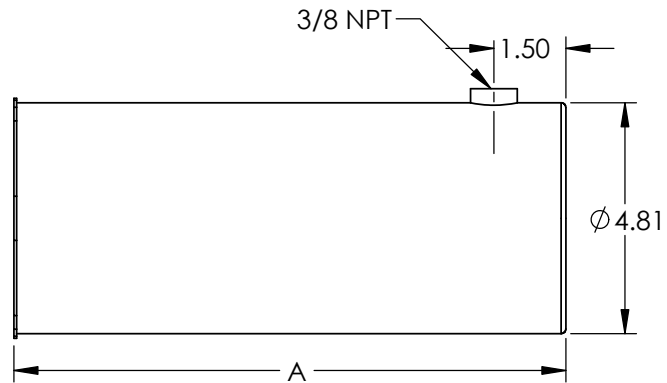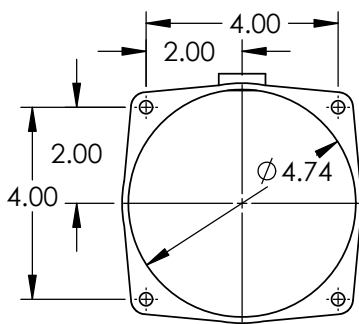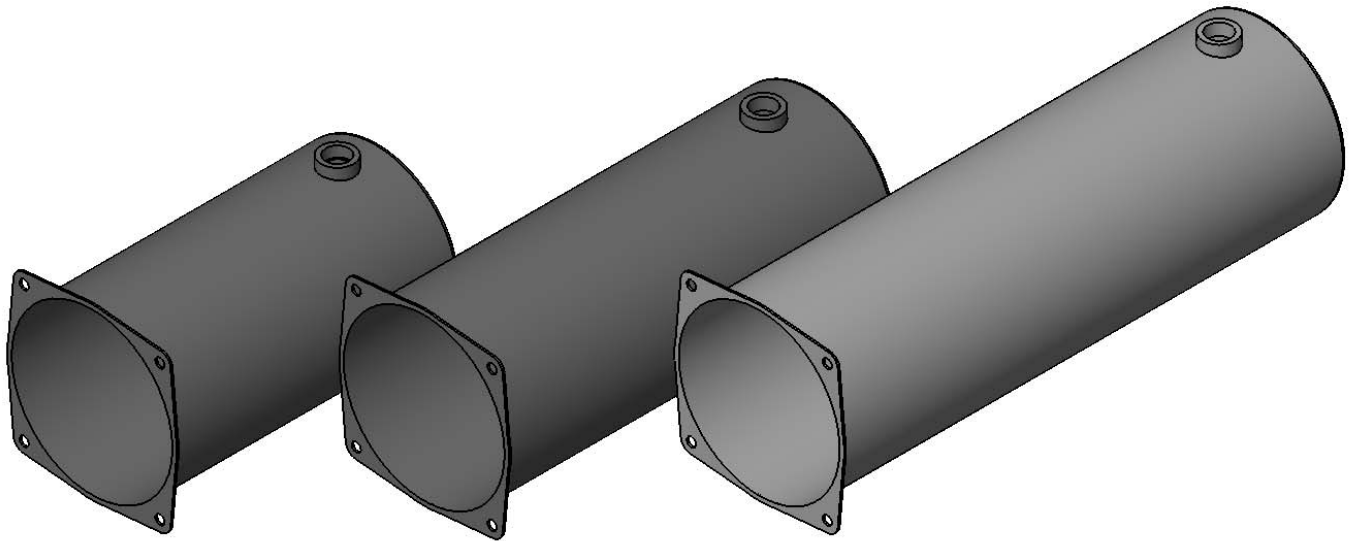


KTI HYDRAULIC INC DEEP DRAW STEEL RESERVOIRS		
PART NO.	USABLE VOLUME	LENGTH "A"
8080-2	2 QT	8.38
8080-3	3 QT	11.5
8080-4	4 QT	14.88



2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

# **DESCRIPTION:**


KTI Hydraulics Inc steel, offset reservoir, black powder coated finish.

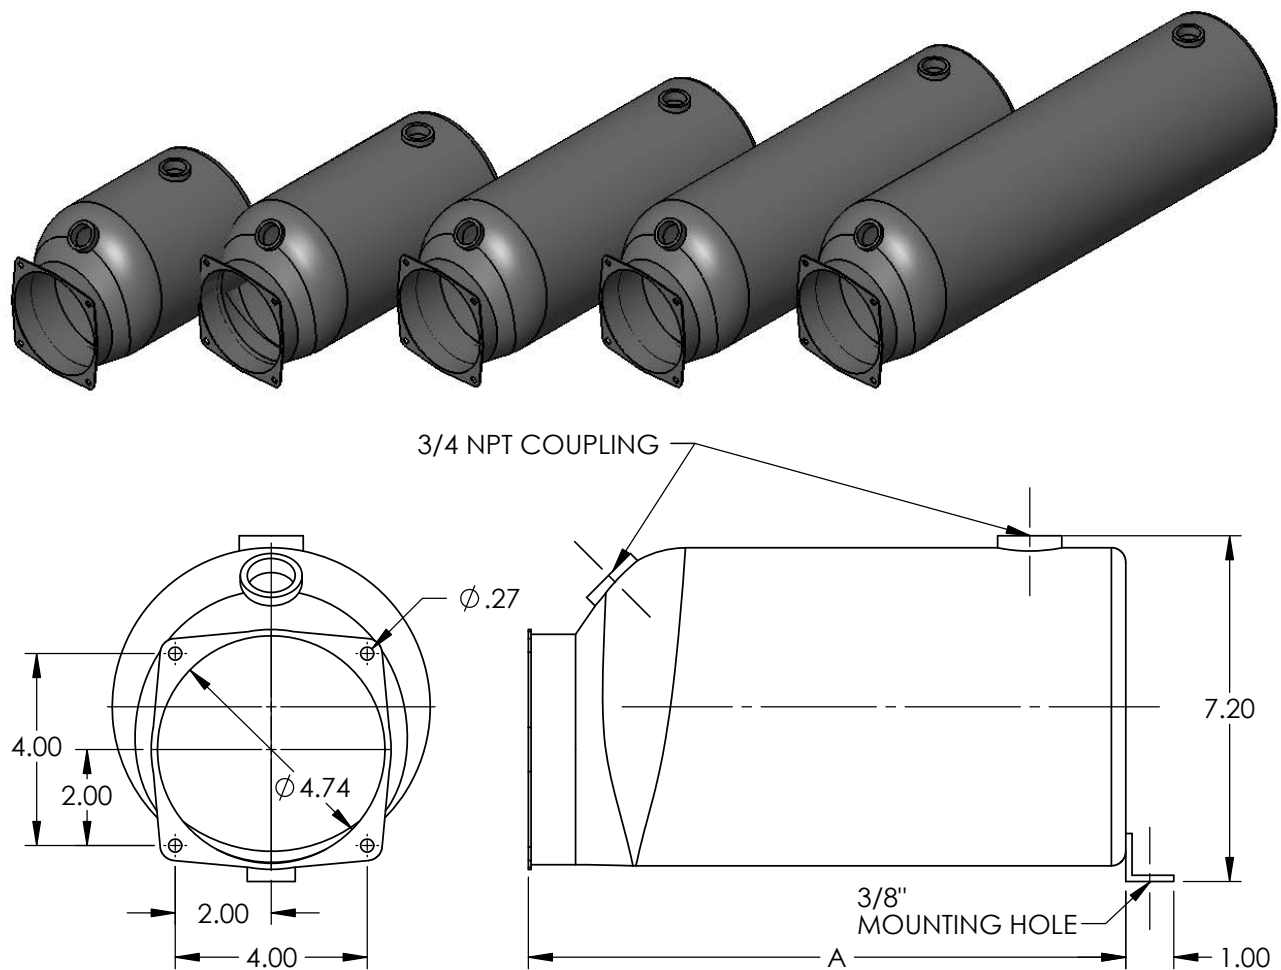

KTI HYDRAULIC INC STEEL OFFSET RESERVOIRS		
PART NO.	USABLE VOLUME	LENGTH "A"
8080-5	4 QT	9.13
8080-6	6 QT	12.50
8080-8	8 QT	15.88
8080-10	10 QT	19.25
8080-12	12 QT	22.63

# DESCRIPTION:



KTI Hydraulics Inc steel, square reservoir, with larger capacity, black powder coated finish.

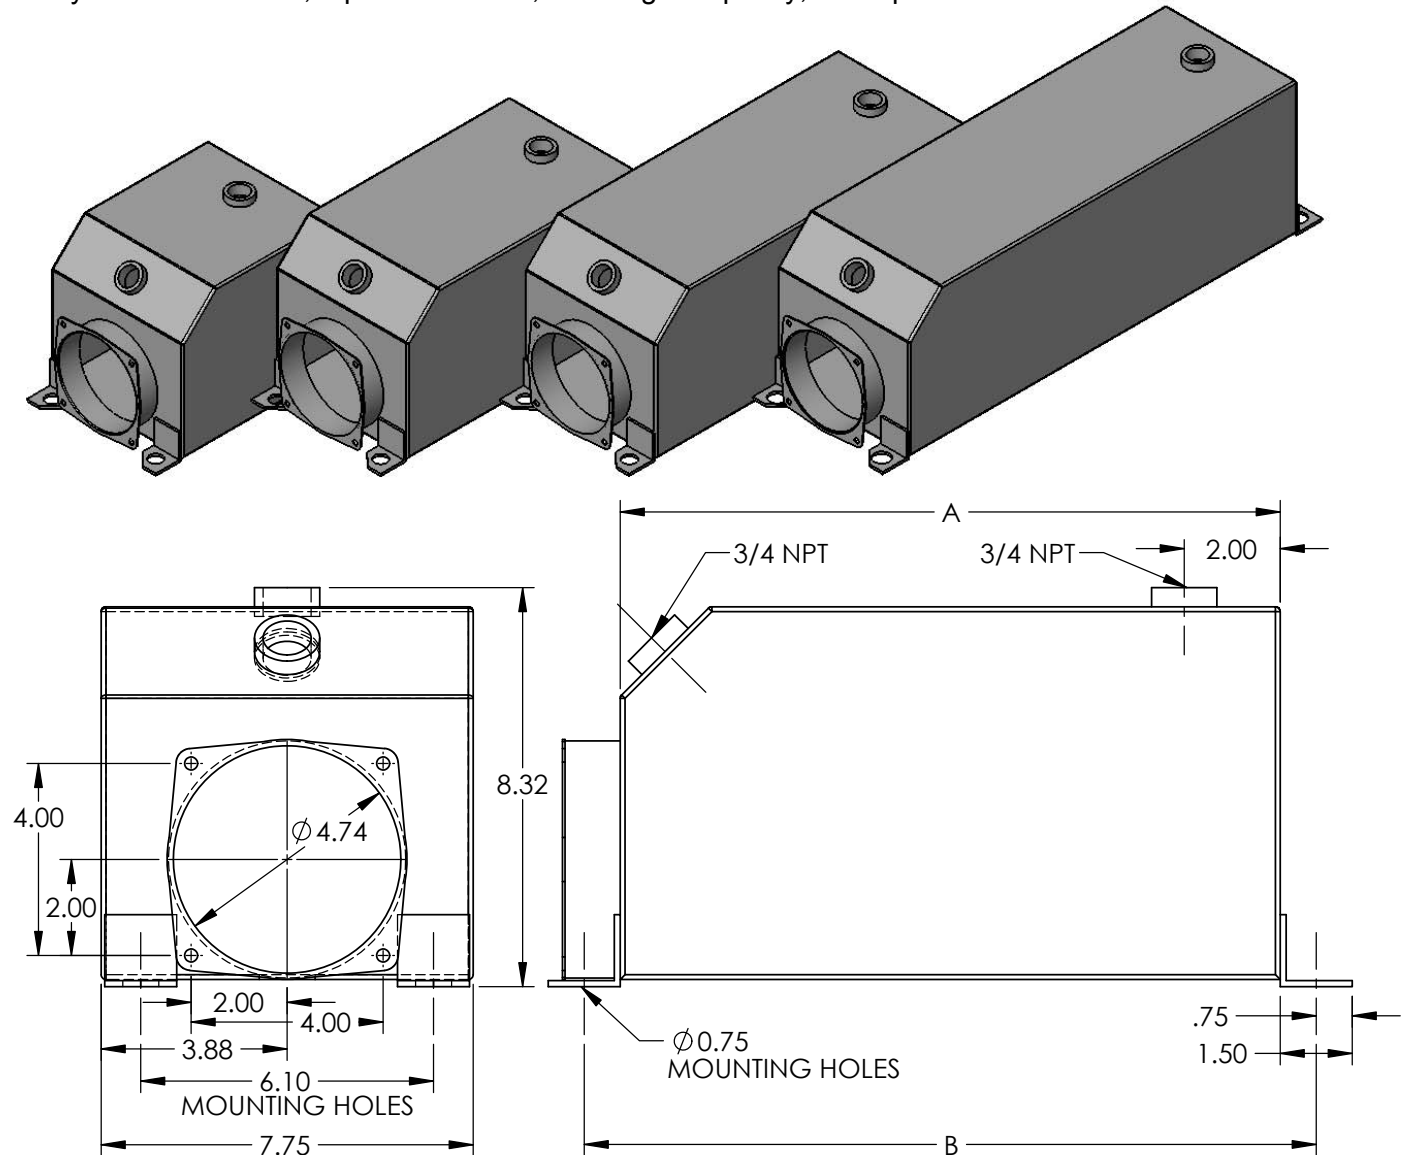

KTI HYDRAULIC INC STEEL SQUARE RESERVOIRS			
PART NO.	USABLE VOLUME	LENGTH "A"	LENGTH "B"
8080-8-S	8 QT	9.24	10.74
8080-13	12 QT	13.75	15.25
8080-16	16 QT	18.50	20.00
8080-20	20 QT	22.88	24.38

# DESCRIPTION:

KTI Hydraulics Inc plastic, square reservoir, with different capacity, white finish.

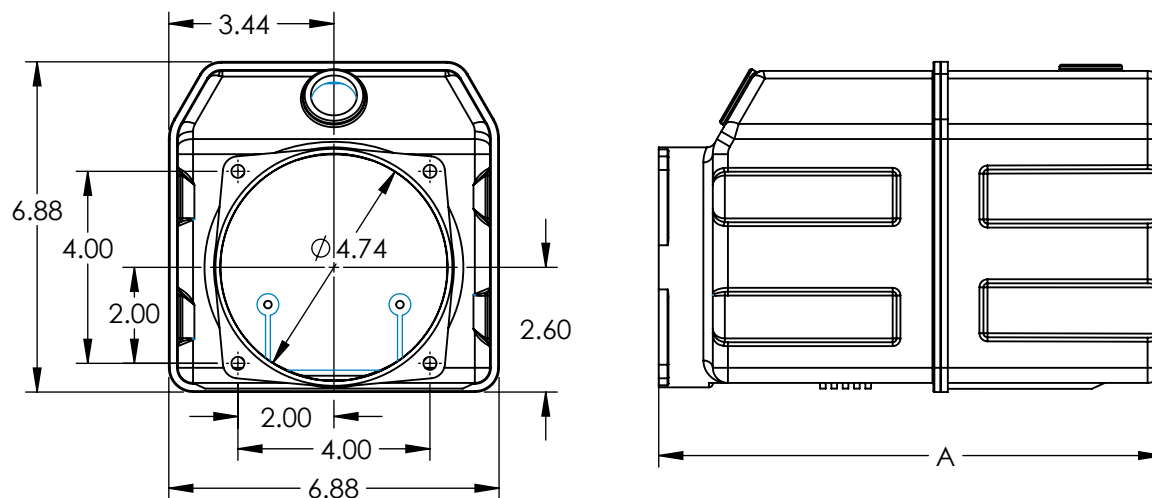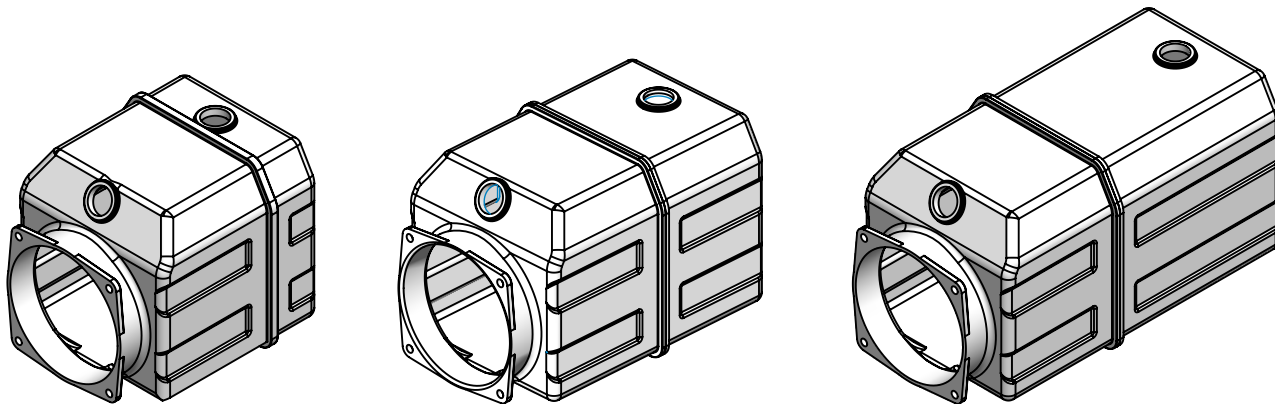


KTI HYDRAULIC INC PLASTIC SQUARE RESERVOIRS		
PART NO.	USABLE VOLUME	LENGTH "A"
8181-35	3 QT	8.00
8181-5	4 QT	10.50
8181-6	6 QT	13.25
8181-14	14 QT	24.875



2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

**DESCRIPTION:**

KTI Hydraulics Inc plastic, square reservoir, with large capacity, white finish.



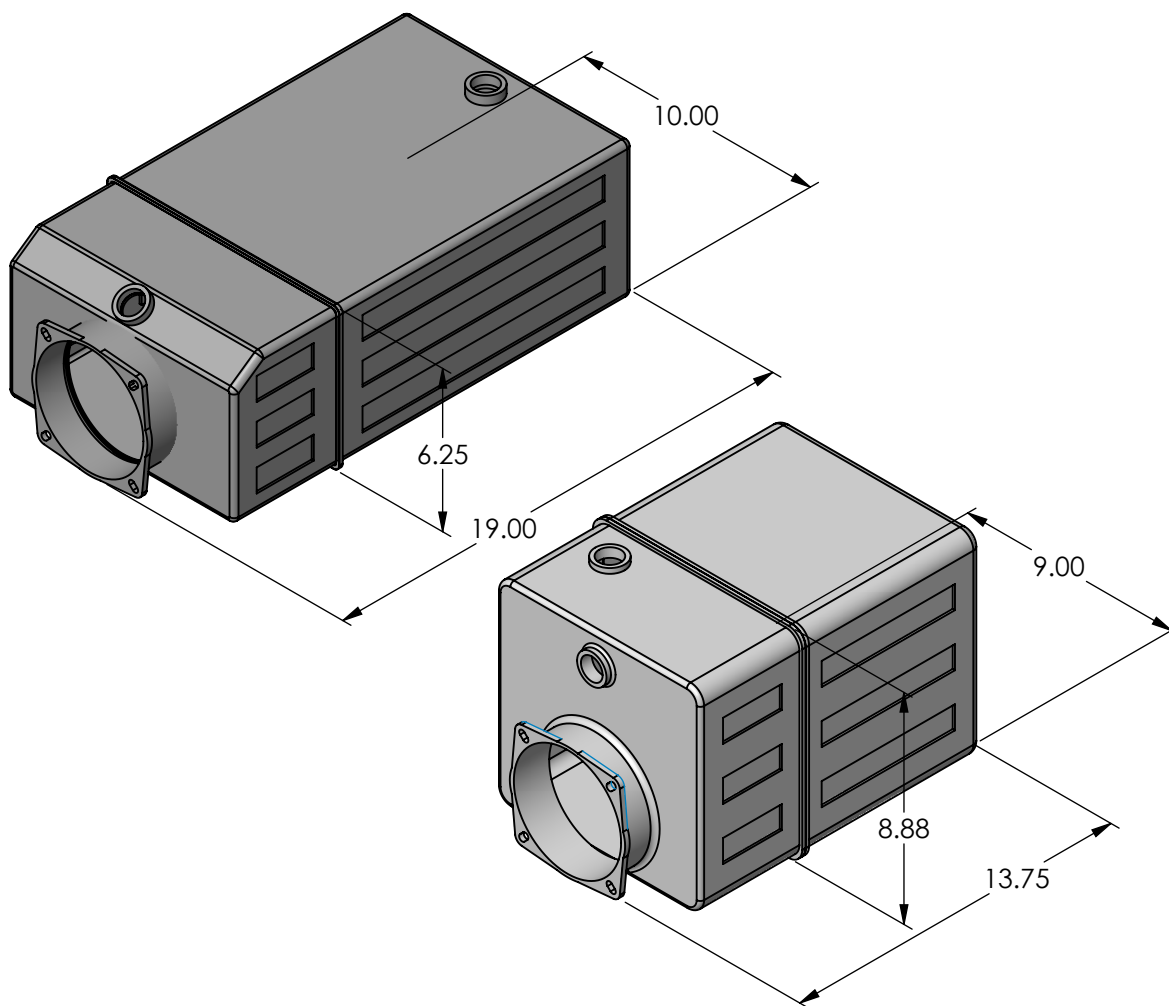


KTI HYDRAULIC INC PLASTIC RESERVOIRS	
PART NO.	USABLE VOLUME
8383-16	15 QT
8484-16	15 QT








2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

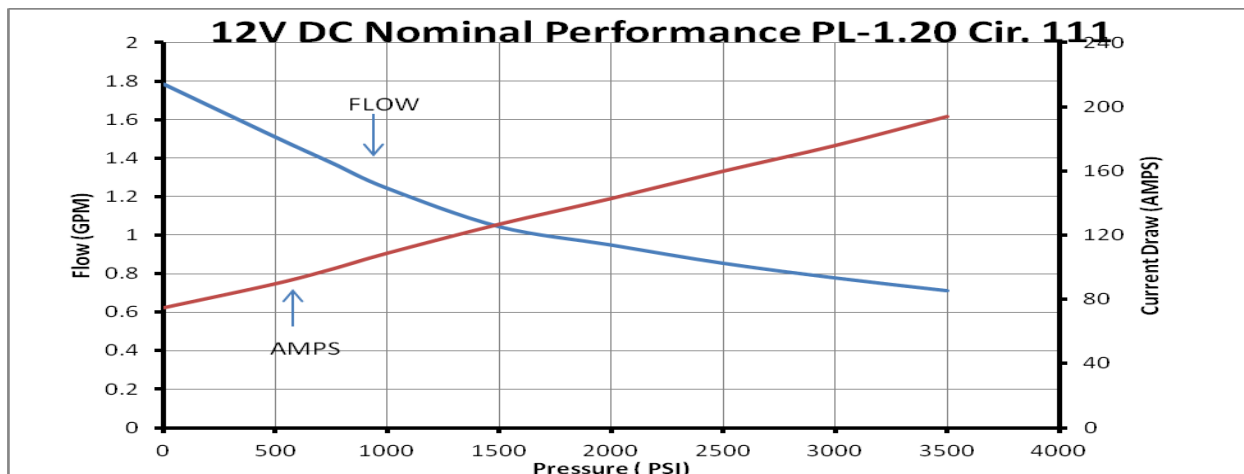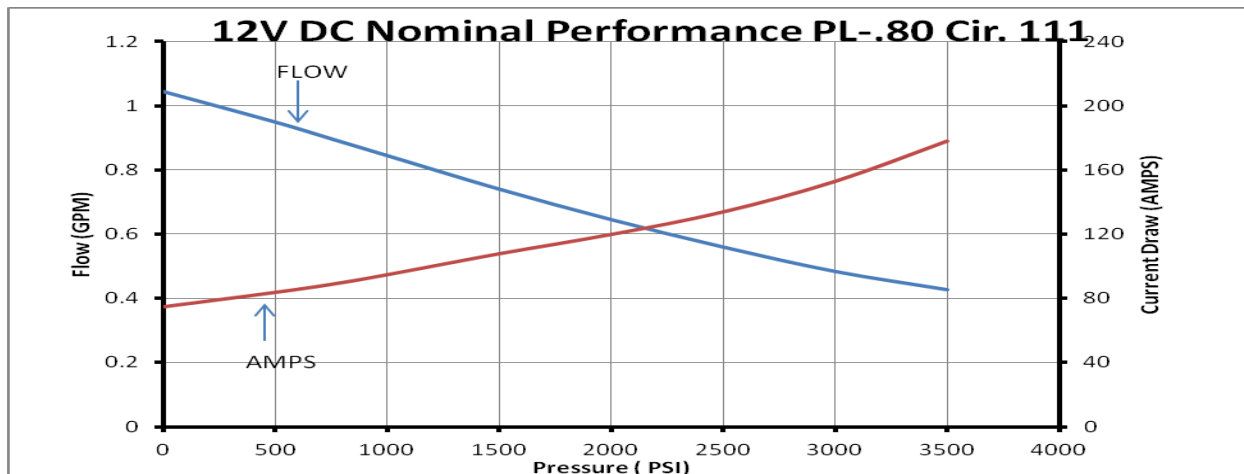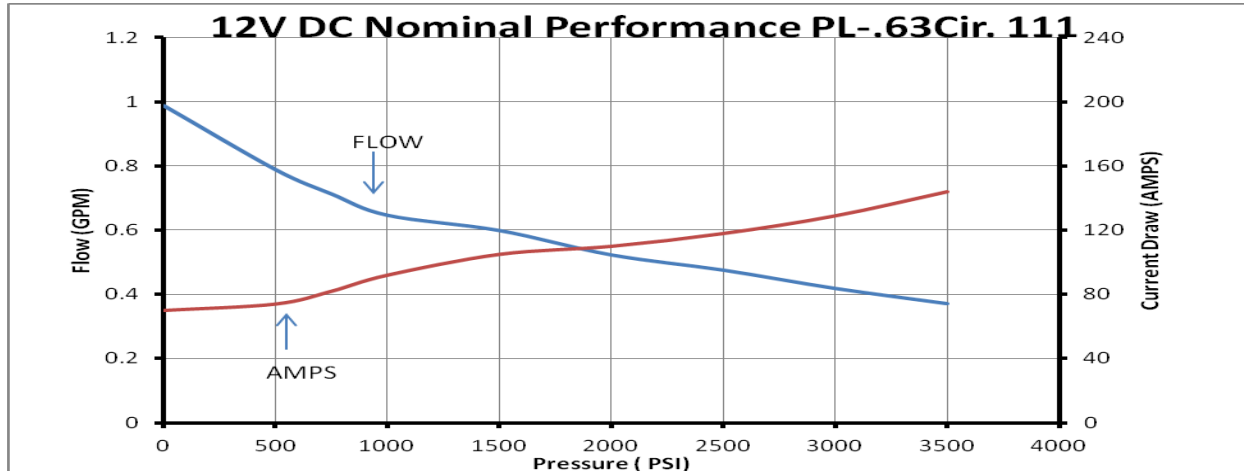








2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

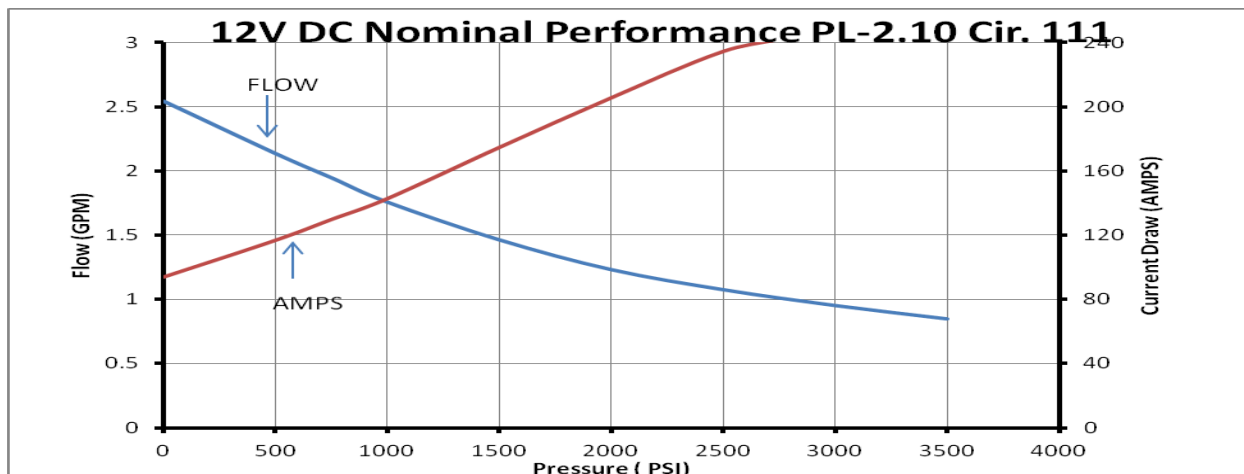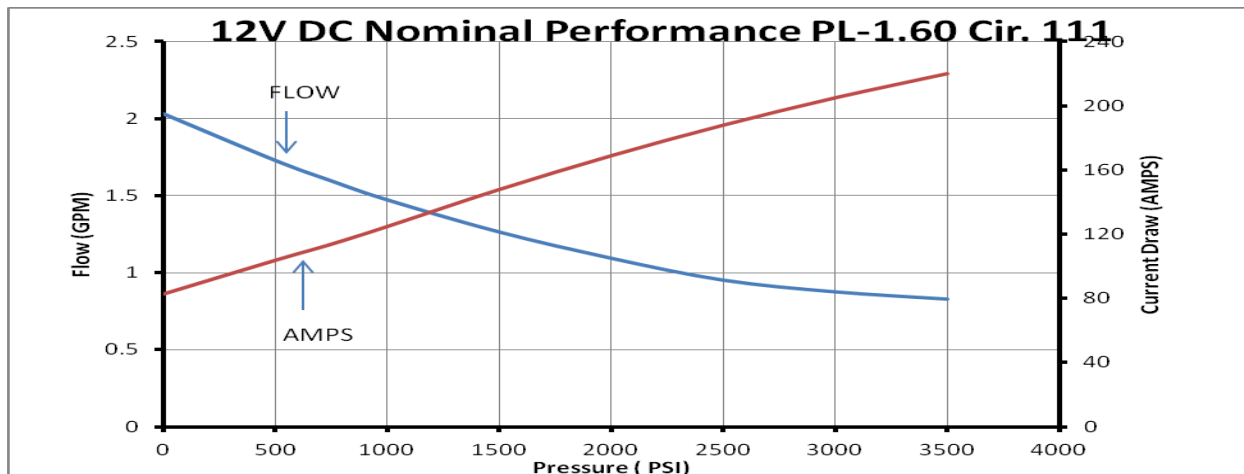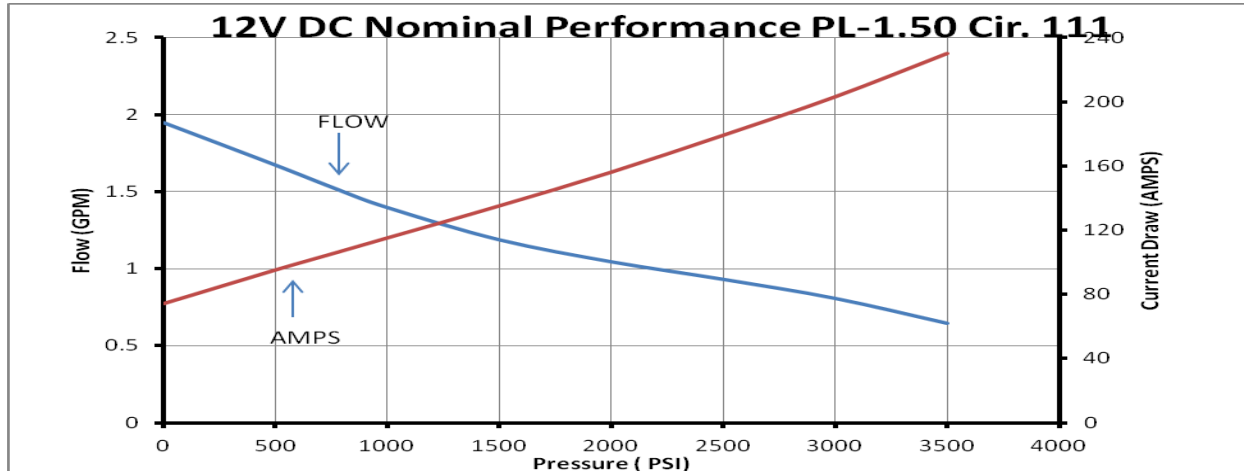






2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

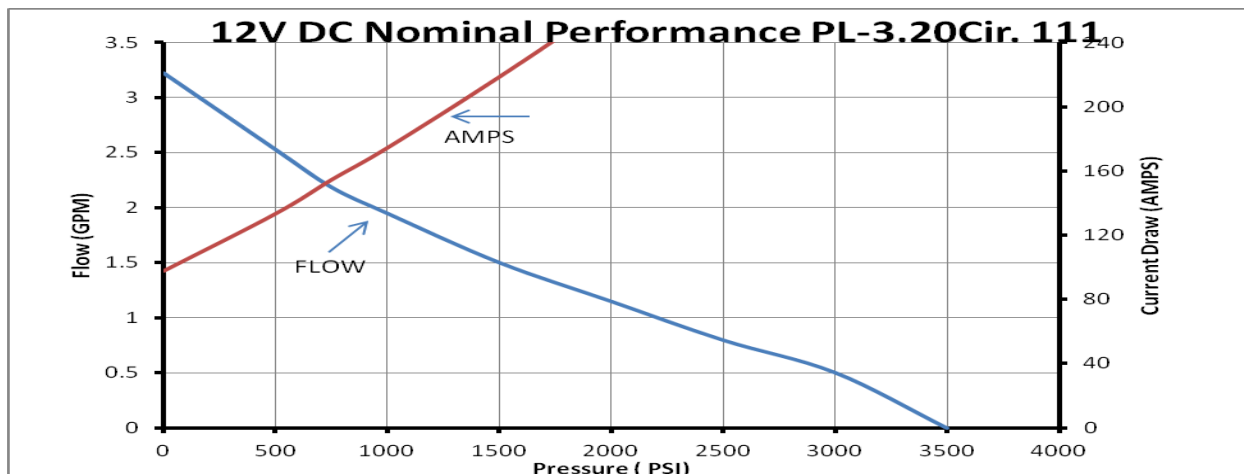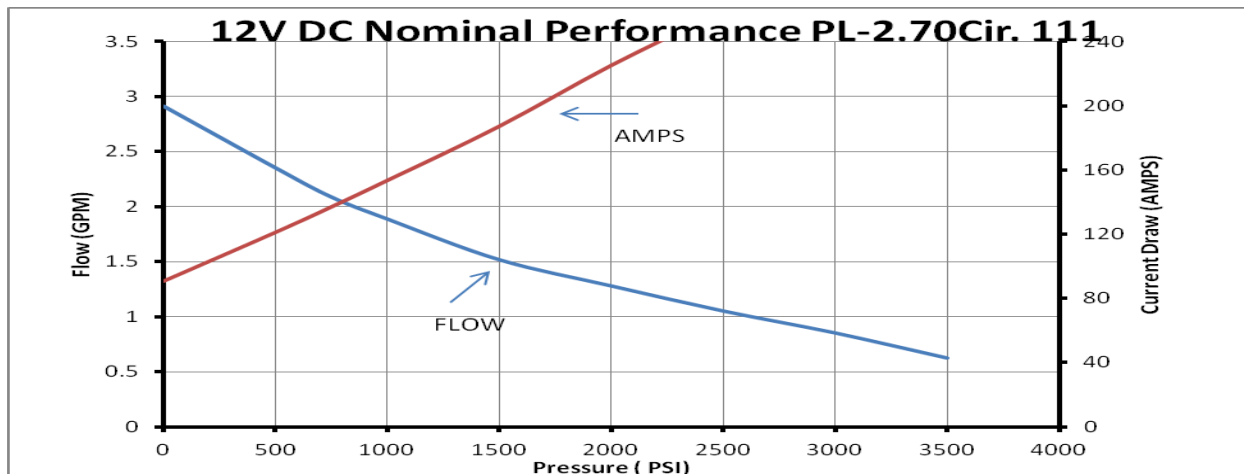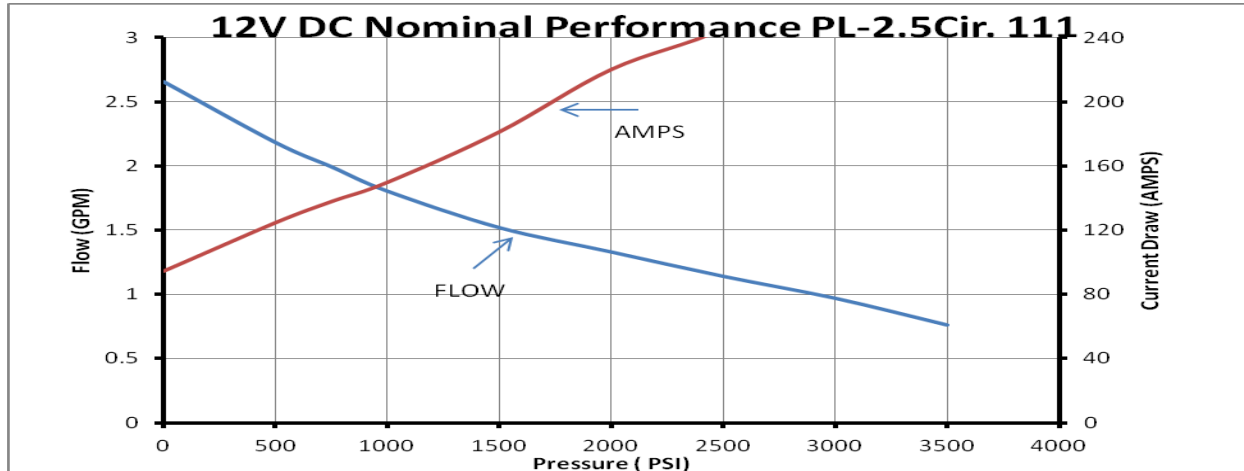






2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

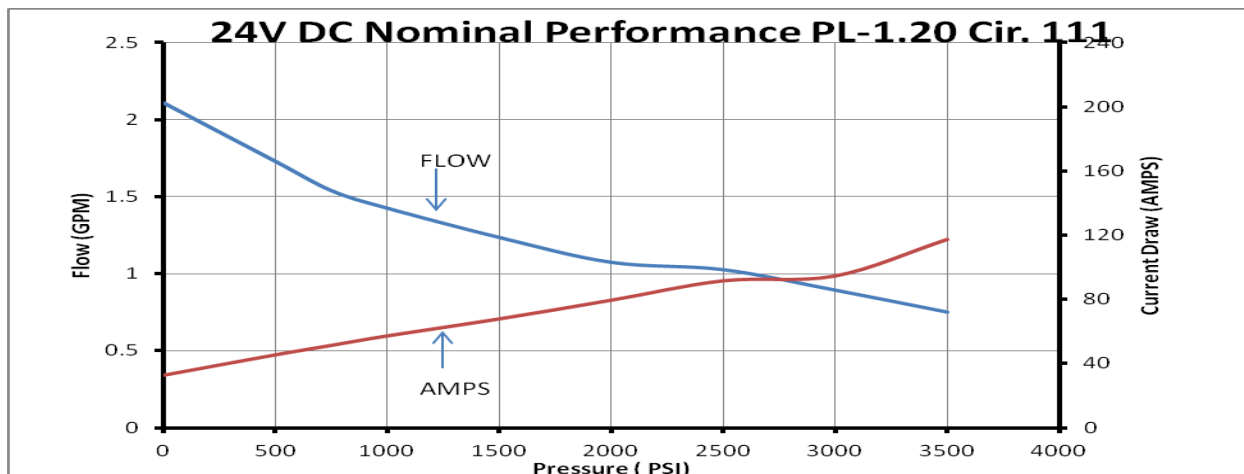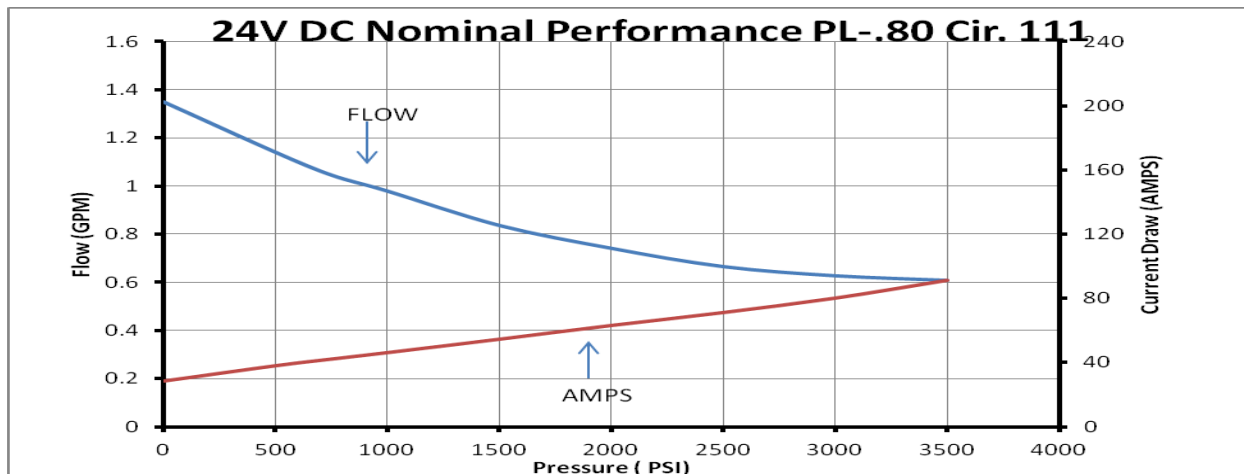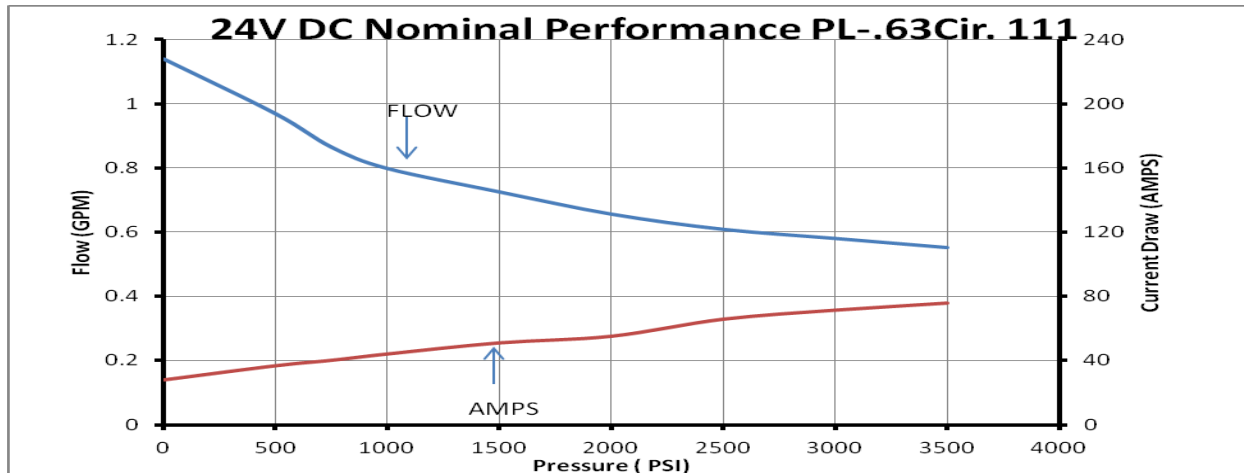






2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

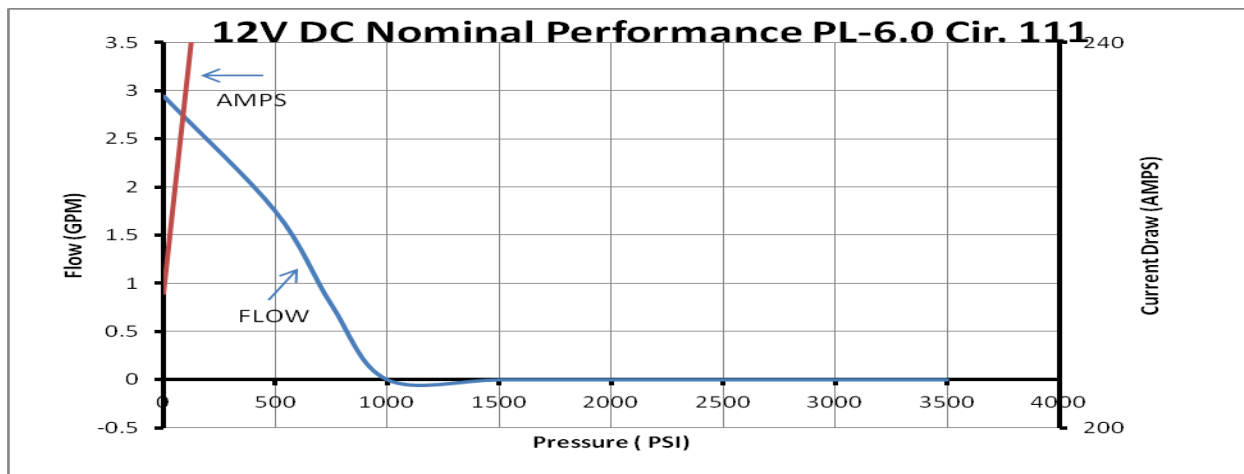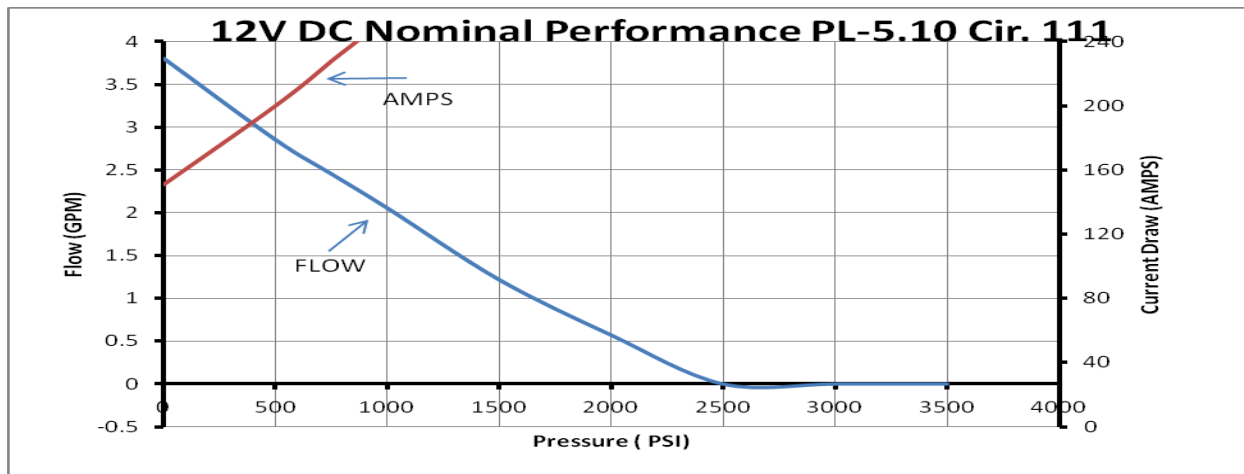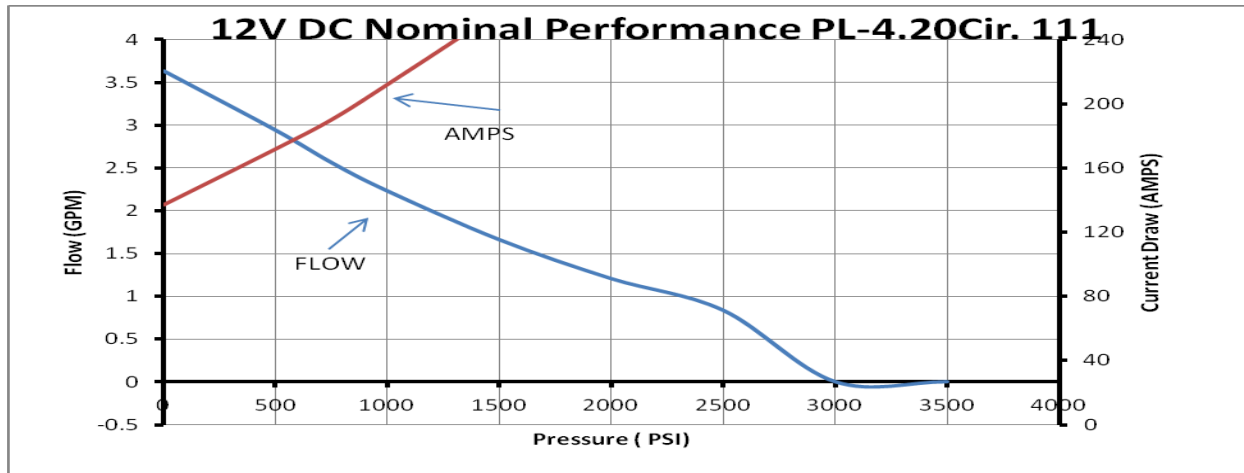






2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

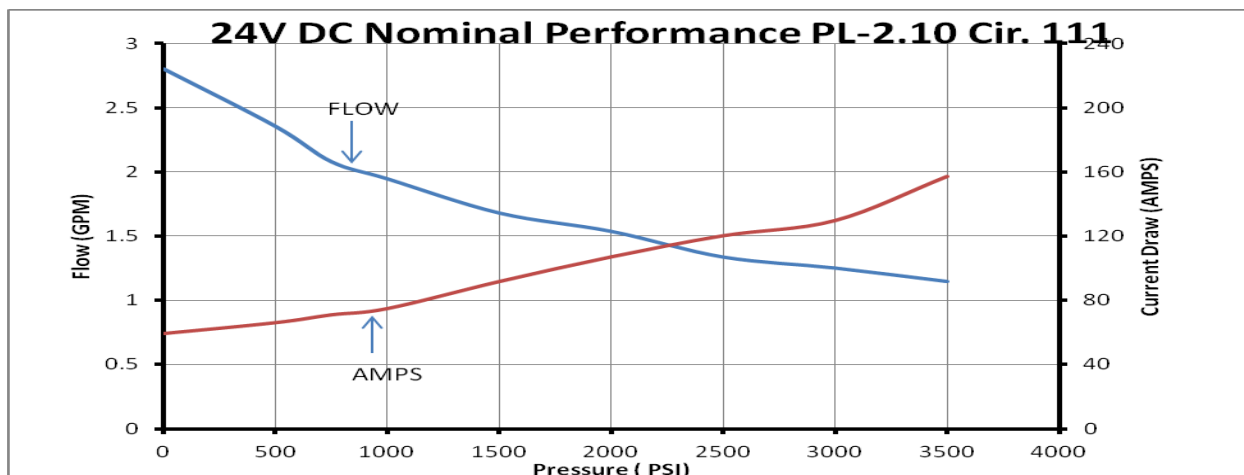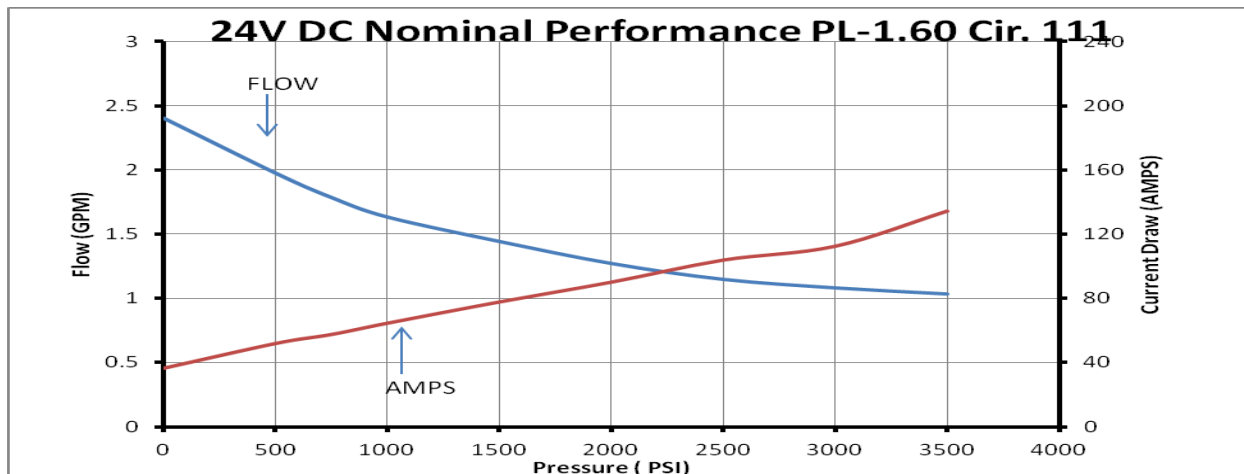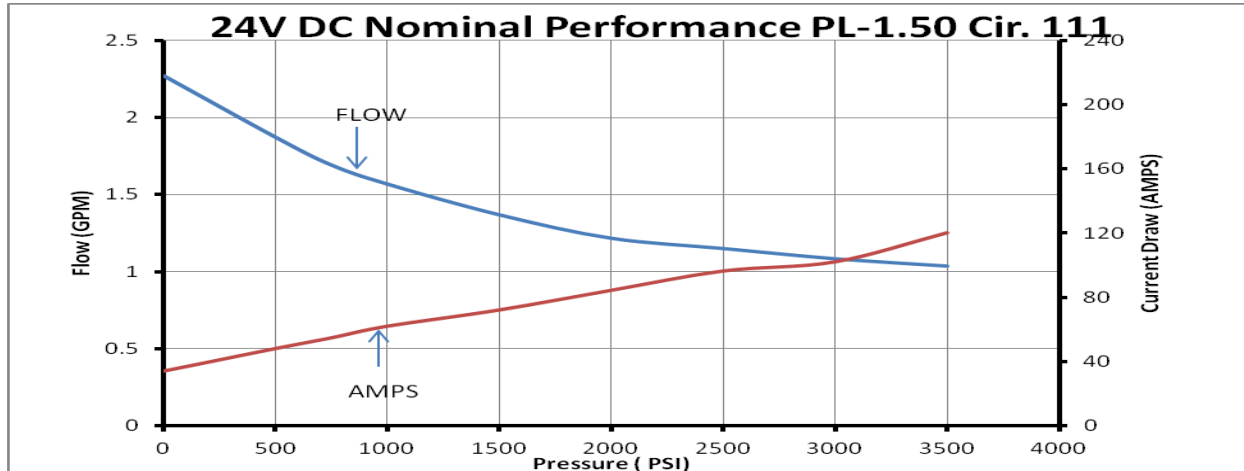




2621 S Daimler St  
 Santa Ana, Ca 92705  
 Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

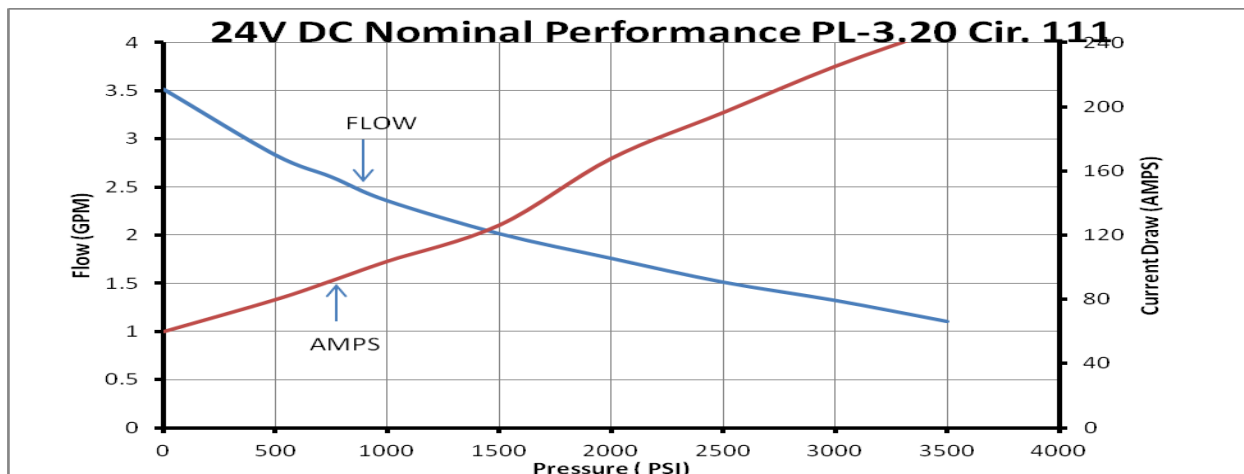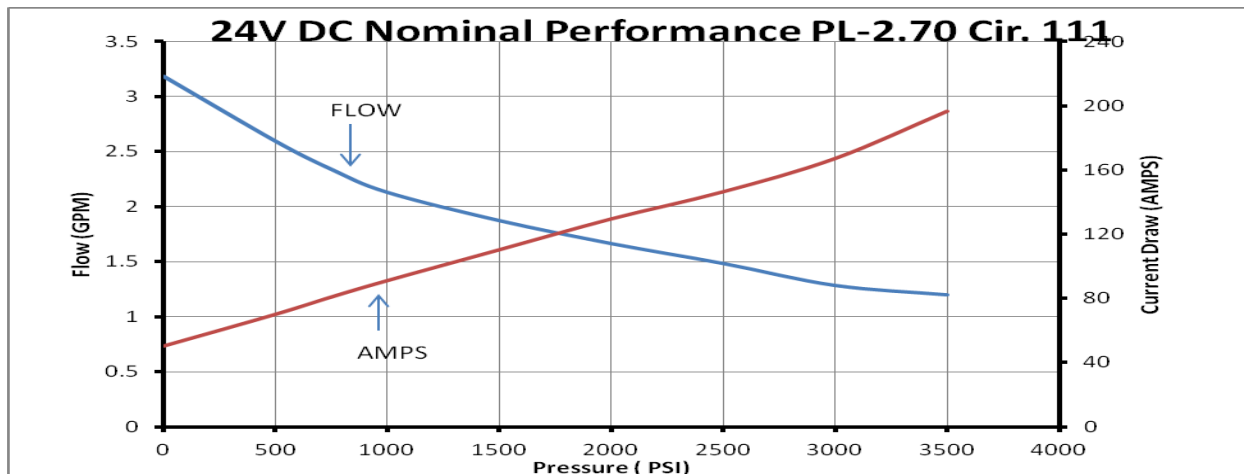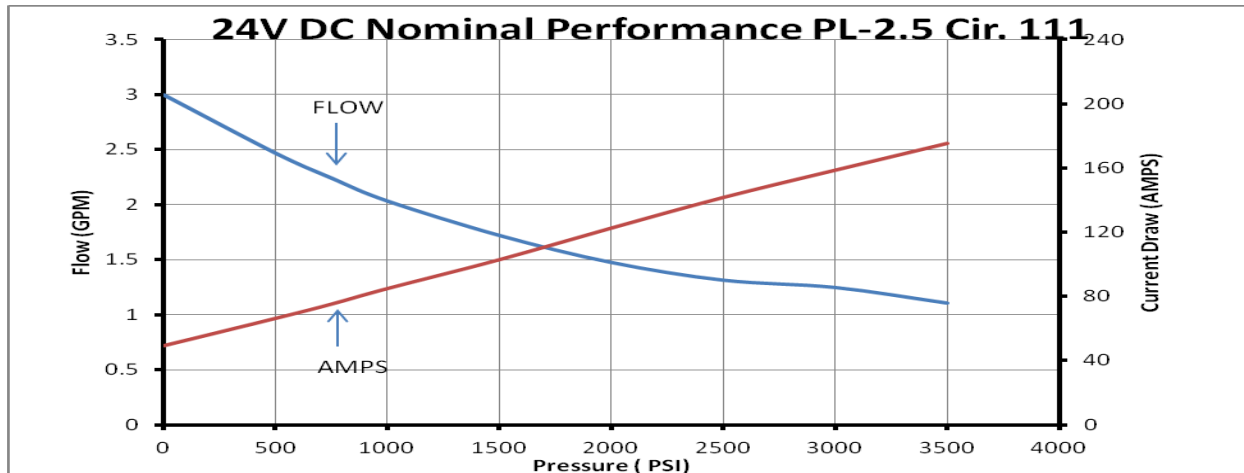





2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

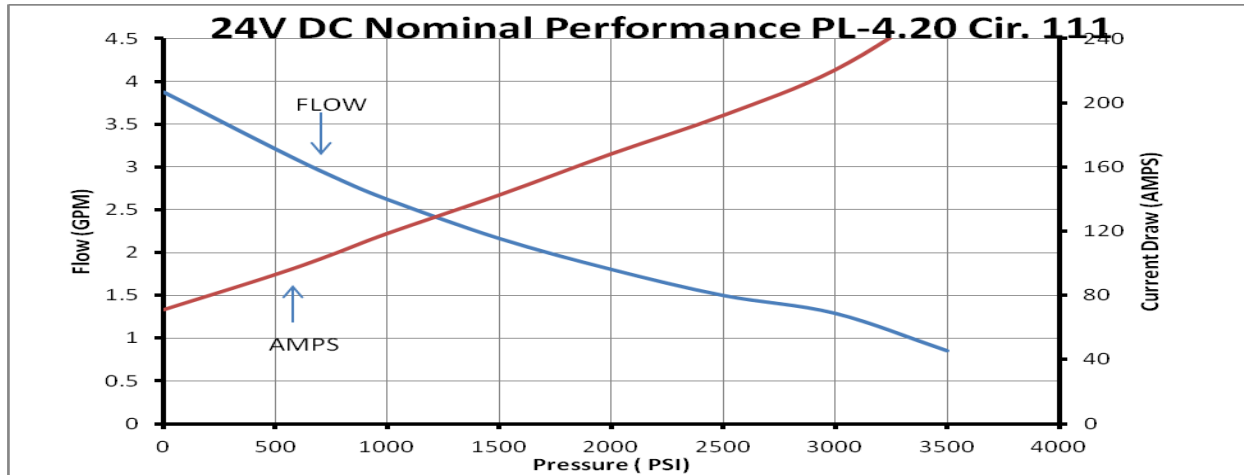



2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

---

### **INSTALLATION RECOMMENDATIONS**

- 1) To avoid contamination, do not remove plastic port plugs until fittings are to be installed.
- 2) Power Unit mounting flange must make full contact with equipment mount; do not use the mounting bolts to force alignment of the power unit on to the equipment mount.
- 3) If pump fails to prime, remove Cartridge Check Valve and start the power unit until hydraulic oil flows from the valve cavity and reinstall the Cartridge Check Valve. *(does not apply to double acting units)*
- 4) Fluid temperature should not exceed 150°F, System reliability and component service life will be reduced.

### **INLET CONDITIONS**

- 1) Positive pressure must be available at the pump inlet while it is operating, overrunning load can cause the pump to cavitate. Consult the factory for inlet pressure requirements and speed limitation.

### **FILTRATION**

- 1) For maximum pump and system component life, the system should be protected from contamination at a level not to exceed 125 particles greater than 10 microns per milliliter of fluid (SAE Class 4 / ISO 16/13).

### **SERVICE**

- 1) Clean fluid essential to system reliability and longer component service life.
- 2) It is recommended that for every 4,000 operating hours or once a year, whichever occurs first, the air filter/ breather cap and suction strainer should be replaced or thoroughly cleaned.
- 3) Every 4,000 operating hours, or once a year, whichever occurs first. Drain hydraulic oil from reservoir and remove reservoir from Manifold (end plate). Use WD-40 or similar product to wipe down and remove all debris inside the reservoir, also check the magnet for signs of metal particles. Lubricate reservoir O-ring with hydraulic fluid to remount the reservoir. Insure reservoir O-ring is not pinched or pushed out of groove during installation.
- 4) For TEFC motors, remove fan casing and wipe fan blade and casing.
- 5) For other service, please consult factory for proper procedures.



2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

### Fluid Recommendations

KTI Hydraulics Inc. recommends using a premium hydraulic oil to ensure optimum performance and system life.

Select oil that has anti-wear properties, rust and oxidation inhibitors, foam inhibitors and good stability. Examples of premium grade hydraulic oils: Chevron Rando HDZ, Mobil DTE 10, and DTE 20 series, AMSOIL, and Shell Tellus.

Automotive Transmission Oils are acceptable under normal conditions.

Aviation Oils such as Valvoline ROYCO series or Mobil Aero HF or HFA may be used in **prolonged & extreme cold** environments.

Do Not Use Biodegradable Hydraulic Fluid. Do Not Mix Oils.

<u>Ambient Temperature Range</u>	<u>ISO Viscosity Grade</u>
----------------------------------	----------------------------

- 20°F to + 32°F	15
(- 29°C to + 0°C)	
+ 14°F to + 120°F	22, 32, ATF
(- 10°C to + 49°C)	

Do not operate Power Unit above recommended Fluid Temperature Range.

Premium hydraulic oil with proper ISO Viscosity Grade and additives such as Chevron EP, Mobile DTE 10, DTE 20 series, or Shell Tell us would be acceptable.

In Most Applications Use ATF Dextron III

### KTI Hydraulics Inc. Limited Warranty

KTI Hydraulics warrants its products free from defects in material, workmanship and design. The period of warranty for DC units is (2) two years and AC units is (1) year after the date of manufacture. Under no circumstances is there any warranty of fitness for a particular use.

KTI hydraulics cannot and does not accept responsibilities for any of its products that have been subjected to improper installation, application, negligence, tampering or abuse. All repairs must be authorized by KTI Hydraulics to reduce the risk of voiding the warranty. KTI Hydraulics liability warranty shall extend only to replacement or repair, f.o.b. KTI.

KTI Hydraulics makes no other warranties, expressed or implied, and is not responsible for any consequential damages resulting from use by any buyer or user. KTI Hydraulics Inc.'s liability is limited to the value of the product sold or obligated repair or replacement of a defective part.

### For warranty request and repair please contact KTI Hydraulics Customer Service.

Power units without model & serial numbers will not be covered under warranty. When calling, please have the model and serial number of the power unit available to facilitate your request.



2621 S Daimler St  
Santa Ana, Ca 92705  
Tel. (714) 556-8818, Fax (714) 556-1520  
[www.ktihydraulicsinc.com](http://www.ktihydraulicsinc.com)

---

## ***KTI Hydraulics Inc Limited Warranty and Return Goods Authorization (RGA) Procedures***

KTI Hydraulics warrants its product free from defects in material, workmanship, and design for a period of two years after date of Manufacture on DC Units and one year from date of manufacturer on AC Units. Under no circumstances is there any warranty of fitness for a particular use and KTI Hydraulics cannot and does not accept responsibilities of any type or any of its products that have been subjected to improper installation, improper application, negligence, tampering or abuse. All repairs must be authorized by factory to reduce the risk of voiding the warranty. KTI Hydraulics' liability warranty shall extend only to replacement or correction, f.o.b. KTI hydraulics. We make no other warranties, expressed or implied, and are not responsible for any consequential damages resulting from use by any buyer or user, our liability being limited to the value of product sold, or obligated to repair or replace a defective part.

**For warranty information or warranty request please contact Customer Service.**

Power units without model number & serial number will not be covered under warranty, when calling please have model number and serial number of the power unit.

**Return Goods Authorization (RGA) Procedures:**

The following requirements must be met by Buyer to return goods for warranty inspection.

- 1) Warranty request must be made via written / e-mail / voice by Buyer to KTI Hydraulics, Inc. with following information:
  - a. KTI Hydraulics Model Number / P/N & Serial Number.
  - b. If lacking Model or Serial Number, It is possible to cross reference through buyer's P.O or KTI Hydraulics Invoice Number.
  - c. Quantities of unit/s under question.
  - d. Reason for return – defect, warranty, or repair & suspected reasons for failure.
- 2) KTI Hydraulics, Inc will issue a RGA number and fax a RGA form with this number to the Buyer. All corresponding paper work will reference this RGA number.
- 3) All RGA numbers are effective 60 days from the issuing date. Buyer has the responsibility to insure proper documentation (item d), proper packaging and ship on prepaid basis unless obtaining prior written authorization from KTI Hydraulics. Return goods shipped to KTI freight collect, or C.O.D. will result in KTI Hydraulics, Inc.'s refusal of said shipment. Return goods received by KTI Hydraulics after the 60 days will be subject to repair and repair charges. KTI Hydraulics will take possession of said return goods when it arrives at KTI Hydraulics, Inc. premise in good order. KTI Hydraulics will refuse any returned goods shipment if it contains power units or parts not manufactured or sold by KTI Hydraulics, Inc. KTI Hydraulics will not be responsible for any extraneous parts that are not manufactured or sold by KTI Hydraulics, Inc.
- 4) All return goods are subject to KTI Hydraulics, Inc. incoming inspection.